

HARDWARE SOLUTION INDEX

Safety Wire	42 - 45
Half Coupler	46 - 47
Slim Half Coupler	48 - 49
Burger Coupler	50 - 51
Coupler w/ Stainless Steel Parts	52 - 53
Handcuff Coupler	54 - 55
Slim Handcuff Coupler	56 - 57
Nugget Coupler	58 - 59
Arch Coupler	60 - 61
Mighty Coupler	62 - 63
Slim Mighty Coupler	64 - 65
Mighty Handcuff Coupler	66 - 67
TV Coupler	68
Ratcheting Jaw C Clamp	69
Universal TV Quick Receiver Coupler	70
Super Convi Clamp	71 - 72
Arm Coupler & Pipe-to-pipe Coupler	73 - 74
Wingnut Multi-spannerws	75
Display Coupler	76
Side Arms	77
Strut Channel & Adapter	78
Universal Light Track Coupler	79
VESA Screen Truss Mount	80
Universal TV Tilt Truss Mount	81 - 82
Mini Coupler 20-25-30-35-40	83 - 84
Truss Coupler	85
Telescopic Hangers	86
Lightweight Telescopic Hanger	87
Quick Action Pipe Clamp & Side Arm	88
Clamp	89 - 95
Pipe Clamp & AL-MG Alloy Slip-on Pipe Clamp	96 - 102
Lighting Stand & Headers & T-bar	103 - 111
Sand Bags & Wrap & Go Shot Bag	112 - 113
X-Bone	114 - 115
Fiberglass Step Ladder	116



www.fortlamps.ru +7495 749 66 09 info@fortlamps.ru



Content

KUPO manufactures various hardware products such as clamps, couplers, convi clamps, safety wire & stands, offering multiple solutions for rigging lighting fixtures on trusses or setting up on the ground securely. Many of our couplers and clamps are TUV certified for greatest reliability. Our safety wire is built in compliance with CE, acting as a secondary security for lighting fixtures when unexpected accidents happen. TUV-certified wind up stand with unique and patented self-locking mechanism provides an easy and effortless manner for lifting lighting fixtures or light truss structures with simply a single hand.

Come and join us on www.stage.com.tw

SAFETY WIRE

Safety wire is the essential element to retain the equipment from unexpected fall-off and secure the accident from any damage. Kupo safety wires are fabricated of galvanized steel wire and constructed in accordance with DIN3055 and DIN3060. It is used as secondary bonding for rigging, lighting and other equipment to truss or stand, rendering a supplement flexible coupling in addition to regular fixing.




This is safety wire comes with an aluminum tag on which laser-engraved information indicates the year of manufacturing, diameter of the wire, and safe working load. Comply with European standard.



One end of wire rope is caught by a small steel ring to stay with quick link.



Thimble at both end.



SW-E01 / SW-E01B

Ø 3.2mm, 7 x 19 wire

WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
10	60	62	Ø5	13.5

This safety wire is built with stainless steel hook and wire rope, and terminated with aluminum ferrule. With its rusty-free feature, it is an ideal choice for outdoor application.

RUST FREE




SW-01ST Ø 3.2mm, 7 x 19 wire (Stainless steel wire)



Stainless hook & wire rope.



Aluminum ferrule terminates the wire.



WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
10	75	60	5.8	7.8




SW-01 / SW-01-B Ø 3.2 mm, 7 x 19 wire



Steel snap hook with eyelet.



Aluminum ferrule terminates the wire.



WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
10	75	60	5.8	7.8




SW-02 Ø 2.0 mm, 7 x 7 wire, Ø 3.0 mm (with PVC jacket)



Steel snap hook with eyelet.



Aluminum ferrule terminates the wire.



WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
5	70	50	4.8	7.0

RUST FREE




SW-03ST Ø 4.8 mm, 7 x 19 wire (Stainless steel wire)



Stainless hook & wire rope.



Aluminum ferrule with steel thimble terminates the wire.

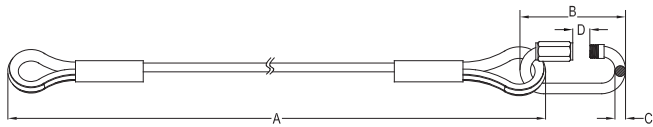

WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
50	100	60	5.8	9.7




SW-03 / SW-03-B Ø 4.8 mm, 7 x 19 wire



Steel screw lock quick link.



Aluminum ferrule with steel thimble terminates the wire.

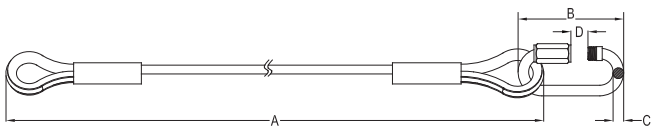

WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
50	100	60	5.8	9.7




SW-04 Ø 3.2 mm, 7 x 19 wire, Ø 4.5 mm (with PVC jacket)



Steel snap hook with eyelet.






Aluminum ferrule terminates the wire with PVC covered.



WLL [kg]	A [cm]	B [mm]	C [mm]	D [mm]
10	75	60	5.8	7.8

Kupo extends the application of safety wire by adding a yoke plate on SW-01 safety wire. By fastening the plate to the yoke of lighting fixture, it offers an easier management for safety wire as the fixing point is just that clear. With this design, the safety bond won't get lost any more as it is firmly attached to the yoke. A simple and clever accessory to the fixtures.

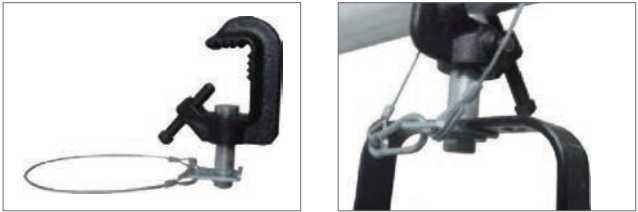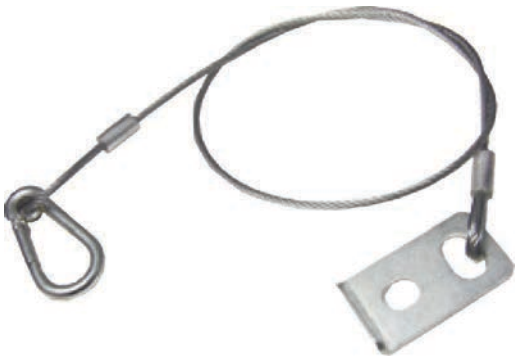

SW-01YP Safety Wire w/ Yoke Plate
Ø 3.2 mm, 7 x 19 wire, SW-01 with yoke fixing plate


WLL [kg]	L1 [mm]	L2 [mm]	L3 [mm]	L4/5 [mm]	A [mm]
10	32	58	3	14.5 15.5	46

Unique design to add safety to the accessories in front of lighting fixture. Black finish makes it low-keyed against luminary. Dia. 2mm wire and overall 60cm length provides the maximum utility.



with half top hat

with color frame on S4 Jr.



SW-ACC
Saety Wire for Lighting Control Accessories
Ø 2.0 mm, 7 x 7 wire, with M4 fixing hole on D-ring

WLL [kg]	A [cm]	B [mm]	C [mm]	D/L1 [mm]
5	60	50	4.8	70 M4

Manufacturing workshop is fully equipped with tension and drop testing machine to ensure each batch of safety wire production meet the breaking force on respective standard. Computerized system is able to sync the testing report.



Lightweight & low profile KUPO professional couplers are constructed from high tensile aluminum extrusion and have been developed for installations where load capacities of up to 500kg are required. The KUPO professional couplers combine strength and durability with a high degree of safety. The couplers are designed to fit tubes with diameter between 48mm-51mm. Some have been tested and certified with TUV approval for a safe working load of 500kg. The standard finish is polished. Custom color or logo is upon request.



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

"CAPTIVE", on top of thread bolt to avoid wing nut falling off the clamp in the air.

Designed for safe connection in trussing system.


Attach securely to tube with outside Dia.48-51 mm.

Kupo half type coupler (KCP-831) is approved by TUV Product Service listed with a safety working load at 500 kg.

Constructed from a high tensile-strength 6061 aluminum-extrusion.


Standard in polish finished. Black is available to specify order.

Nylon lock nut & bolt.

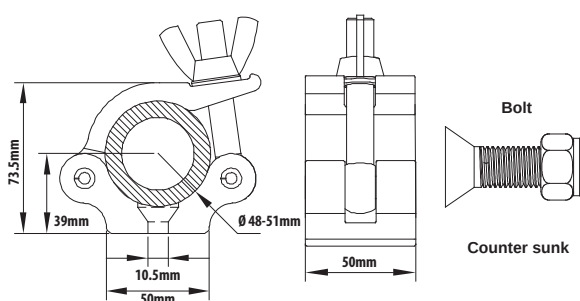


KCP-831 / KCP-831B Half Coupler

W 0.52kg ↓ 500kg Bolt M10 x 30mm

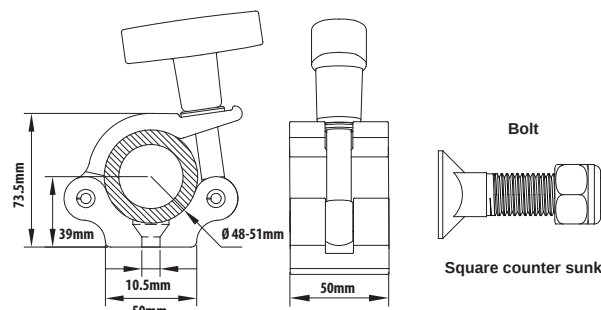


KCP-831-T / KCP-831B-T T-Handle Half Coupler

W 0.58kg ↓ 500kg Bolt M10 x 40mm

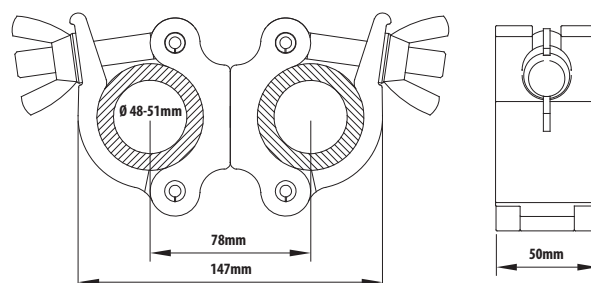

KCP-832 / KCP-832B Swivel Coupler


W 1.2kg ↓ 500kg

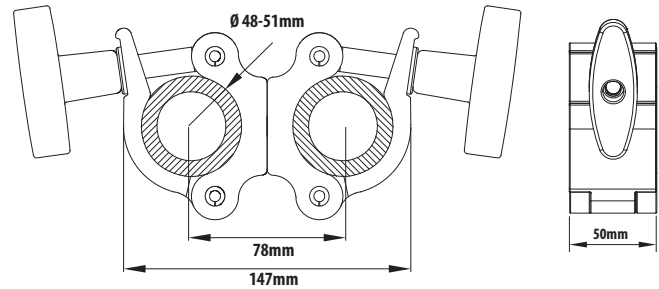

KCP-832-L / KCP-832B-L Swivel Couper with T handle

W 1.1kg

500kg

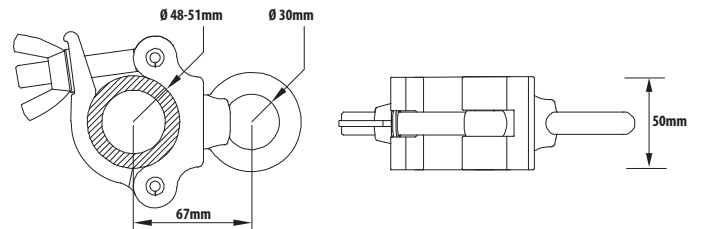


KCP-833 / KCP-833B Eye Ring Coupler

W 0.65kg

340kg


M12 Eye Ring

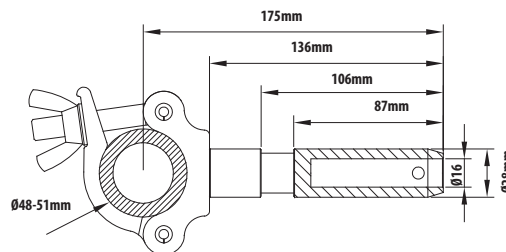

KCP-834 / KCP-834B 28mm Spigot Coupler

W 0.7kg

200kg

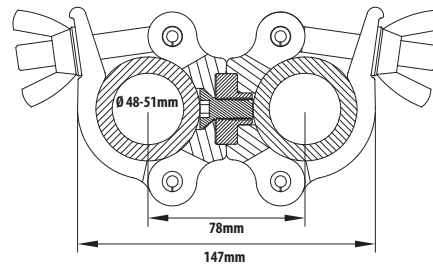


KCP-873 / KCP-873B 45-Degree Coupler


*Fix in every 45 degree with hex tool.

W 1.04kg

500kg

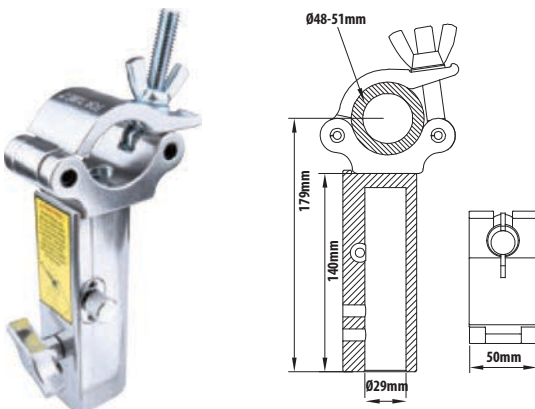

KCP-874 Half Quick TV Coupler W 1.16kg 100kg

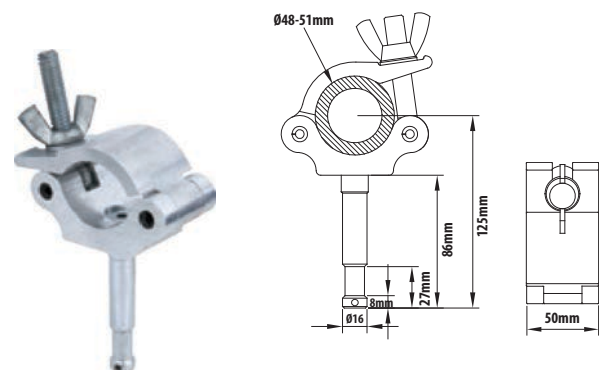

KCP-836 16mm Stud Coupler W 0.6kg 100kg

Constructed from high tensile 6061-T6 aluminum and carries the same features as half coupler, but comes in just 30mm wide for better rigging utility. Slim half coupler has been TUV approved and certified with WLL 300kgs.



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

"CAPTIVE", on top of thread bolt to avoid wing nut falling off the clamp in the air.


Fabricated of 6061-T6 high tensile aluminum extrusion for greatest durability.

TUV approval with WLL 300kgs.

Available in polished or black finish.


Feasible for tube diameter 48-51mm.

Nylon lock nut & bolt.

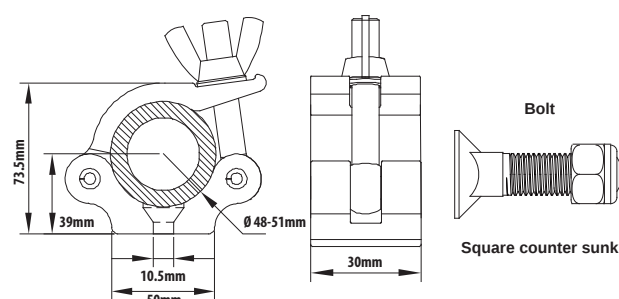


KCP-830 / KCP-830B Slim Type Half Coupler

W 0.3kg ↓ 300kg Bolt M10 x 40mm

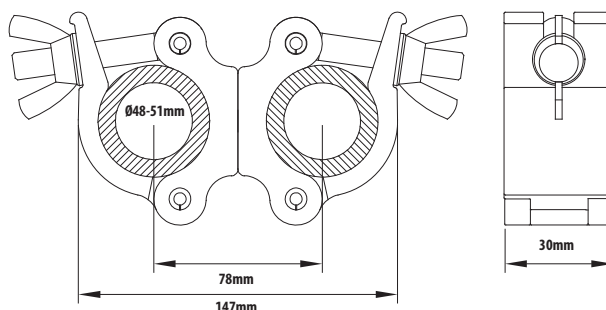


KCP-820 / KCP-820B Slim Type Swivel Coupler

W 0.7kg ↓ 300kg

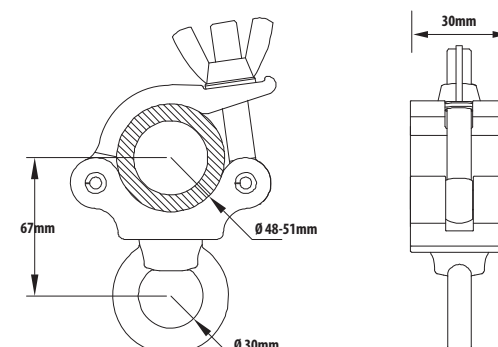


KCP-823 / KCP-823B Slim Type Eye Ring Coupler

W 0.5kg ↓ 500kg

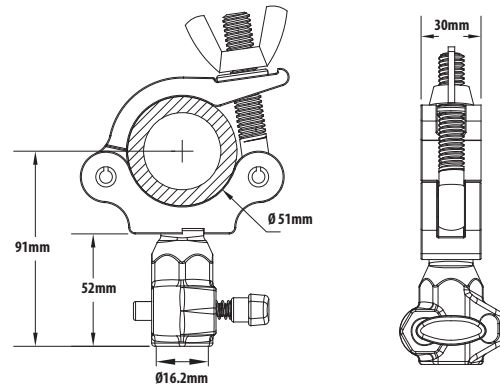

KCP-842B Slim Type Half Coupler 16mm Socket


W 0.46kg Working Load Limit 50kg

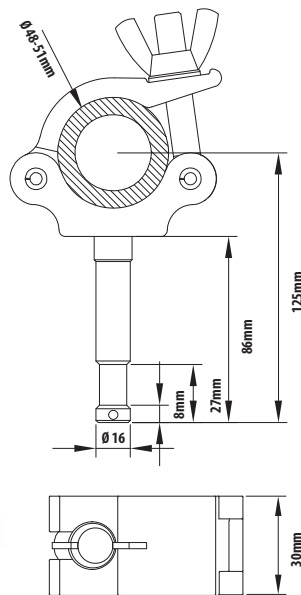

KCP-826

Slim Type 16mm Stud Coupler


W 0.44kg Working Load Limit 100kg

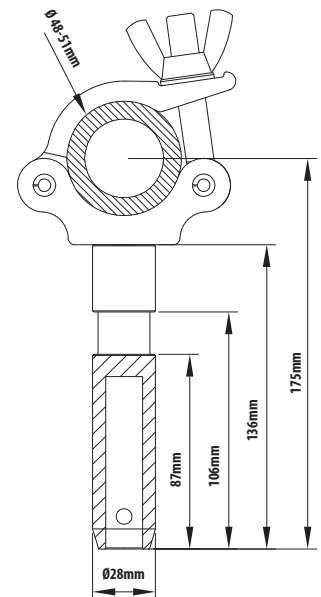

KCP-824

Slim Type 28mm Spigot Coupler


W 0.79kg Working Load Limit 200kg

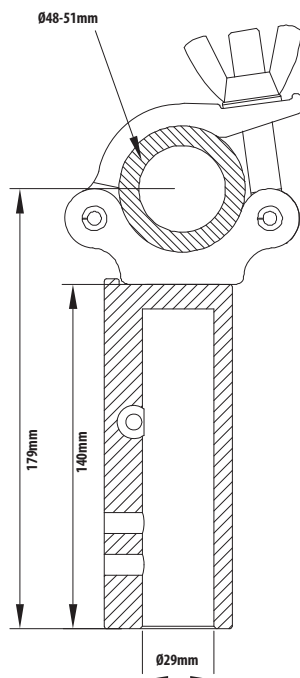

KCP-875

Slim Type Quick TV Coupler

W 0.96kg Working Load Limit 100kg

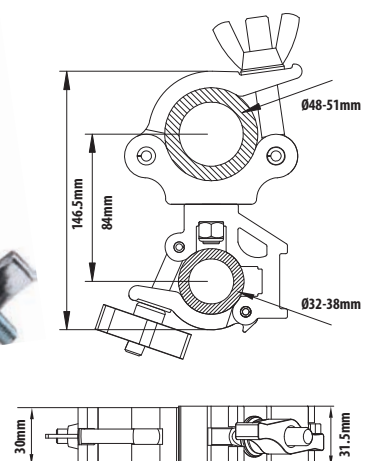

KCP-868

Slim Type Swivel Coupler for 2" to 1.25"-1.5"

W 0.58kg Working Load Limit 120kg

Burger coupler is made from high tensile aluminium extrusion. The slim profile makes it an ideal alternative option for rigging light weight fixture. T-shape handle provides comfortable utility to user. TUV certified and rated WLL 75KG.



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

Solid T handle provides comfort operation with bare hand.


Fabricated of 6061-T6 high tensile aluminum extrusion for greatest durability.

TUV approval with WLL 75kgs.

Available in polished or black finish.


Feasible for tube diameter 48-51mm.

M10 bolt and wing nut.

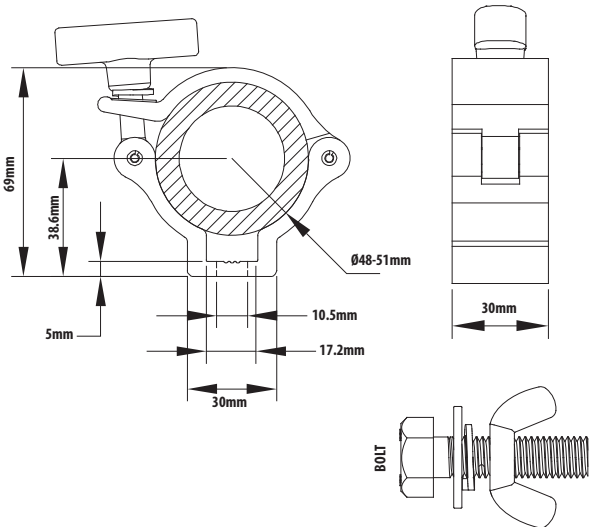


KCP-901 / KCP-901B Burger Coupler

W 0.20kg Working Load Limit 75kg Bolt M10 x 30mm

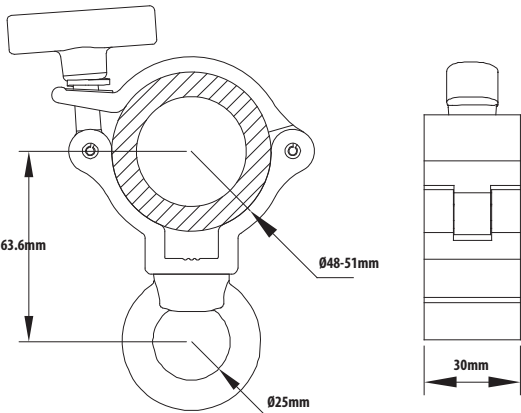


KCP-903 / KCP-903B Eye Ring Burger Coupler

W 0.24kg Working Load Limit 75kg

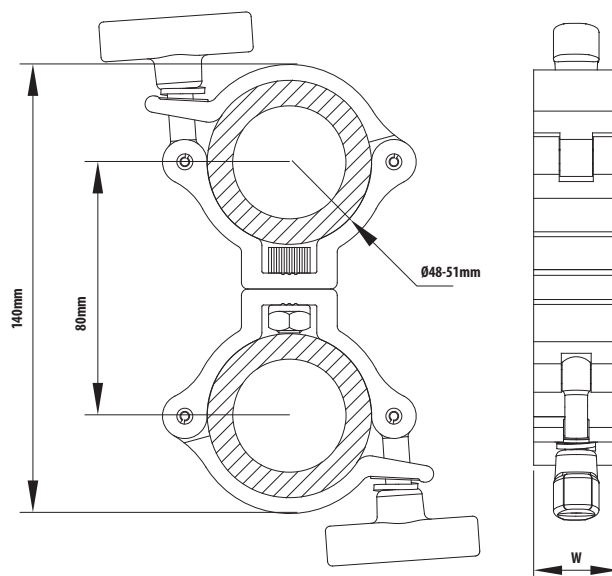


KCP-902 / KCP-902B Burger Swivel Coupler

W 0.3kg Working Load Limit 60kg

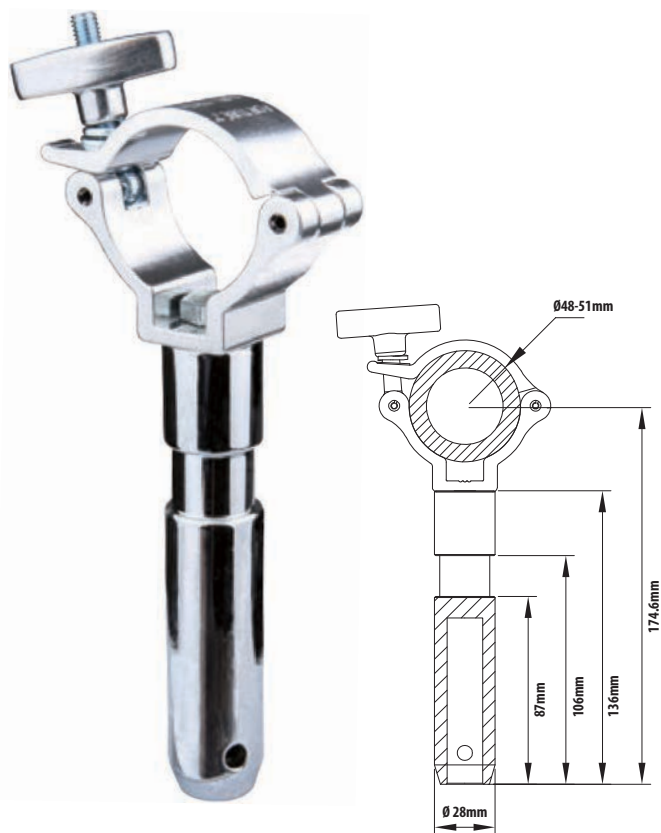

KCP-904
Burger 28mm Spigot Coupler

W 0.61kg Working Load Limit 75kg

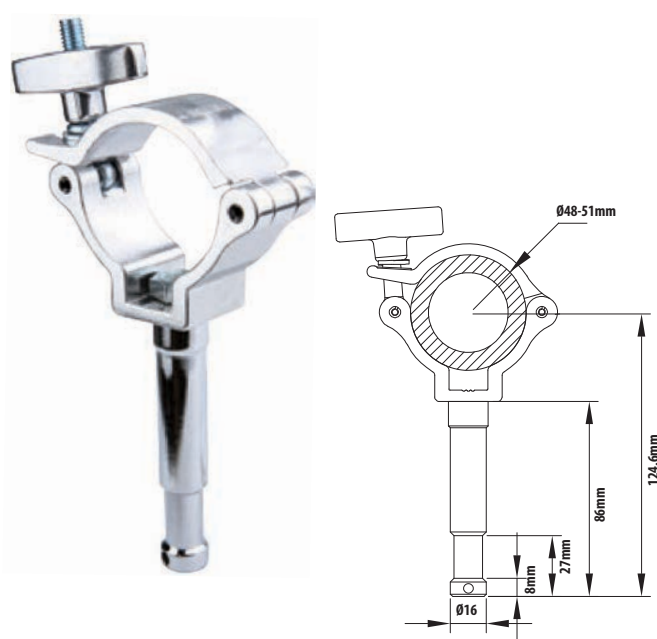



KCP-906
Burger 16mm Stud Coupler

W 0.26kg Working Load Limit 75kg

KUPO has been known for full range of quality couplers with TUV certified. In addition to classic range and black series, here are three newcomers for diverse selection. New ones are aluminium-extruded main structure built up with stainless steel parts; great for outdoors application or where rust-free is required or chemical exposure is concerned. Available with slim half type (KCP-830ST), half type (KCP-831ST) and swivel type (KCP-832ST).

Except for the aluminum-extruded main frame, the following parts in this range are supplied with stainless steel.

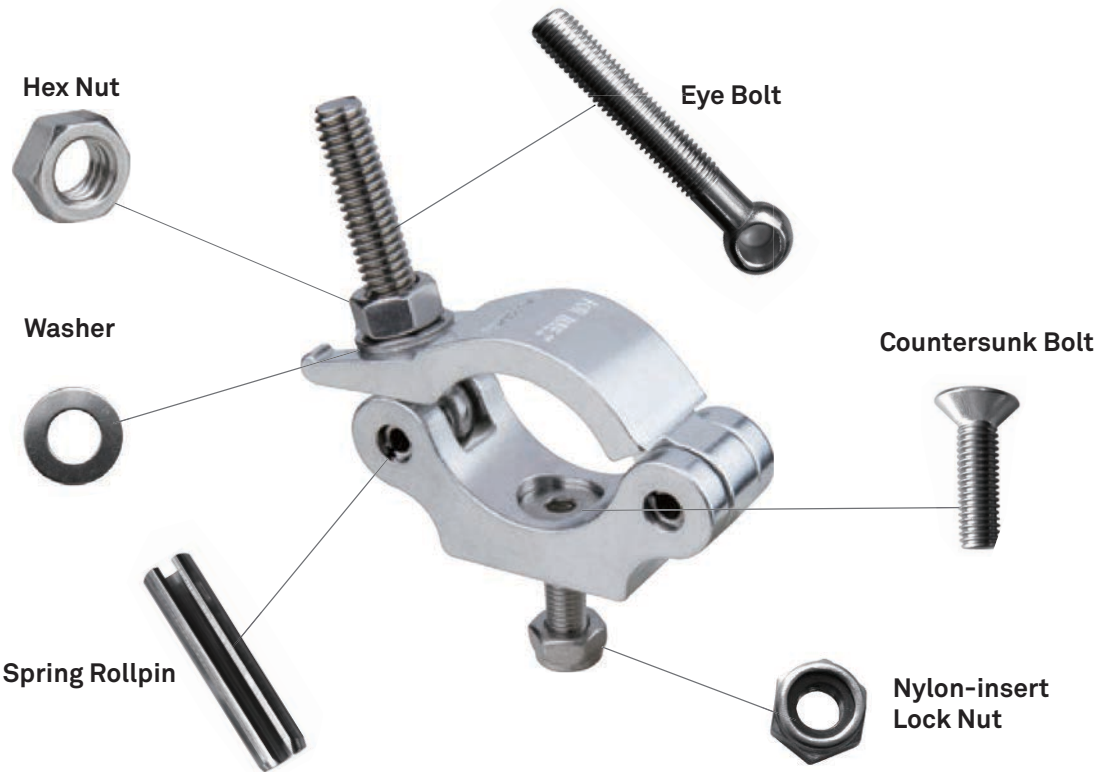

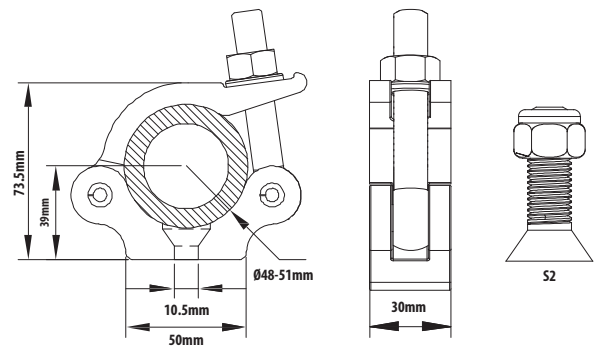


KCP-830ST Slim Type Half Coupler

W 0.3kg

Working Load Limit 300kg

Bolt M10 x 35mm, Counter Sunk

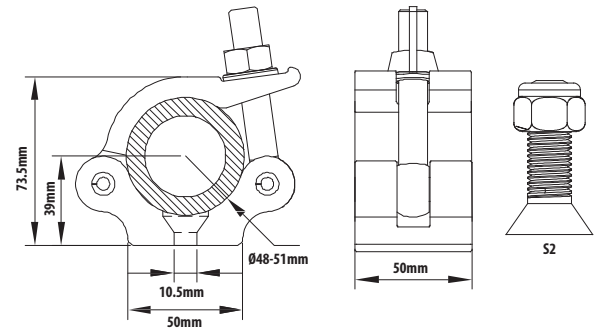


KCP-831ST Half Coupler

W 0.52kg

Working Load Limit 500kg

Bolt M10 x 35mm, Counter Sunk

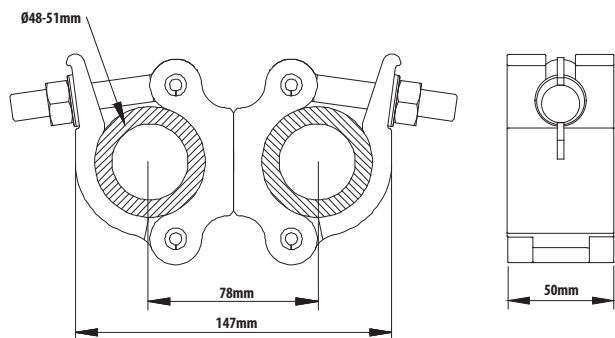

KCP-832ST Swivel Coupler

W 1.2kg

Working Load Limit 500kg



Handcuff Clamp is constructed from high tensile 6061 aluminum extrusion. It is one of the most popular rigging hardware in the industry. Thanks to triggering mechanical design, this clamp is made to help the person rig heavy luminaries with less effort and saving much working time. TUV certified for both standard and slim profiles. Work safely.



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

"CAPTIVE", on top of thread bolt to avoid wing nut falling off the clamp in the air.



Save time and effort in rigging fixture.

TUV certified
Standard type for
WLL 200 kgs Slim
type for WLL 100 kgs.

Design for Dia 48-51
mm tube system.



Polish and black
finish are available.

Double level's counter
sunk for M10 or M12
hex. head bolt.





KCP-838 / KCP-838B Handcuff Coupler

W 0.65kg ↓ 200kg Bolt M12 x 38mm




KCP-838-T / KCP-838B-T T-Handle Handcuff Coupler

W 0.85kg ↓ 200kg Bolt M12 x 38mm




KCP-843 / KCP-843B Handcuff Eye Ring Coupler

W 0.69kg ↓ 140kg

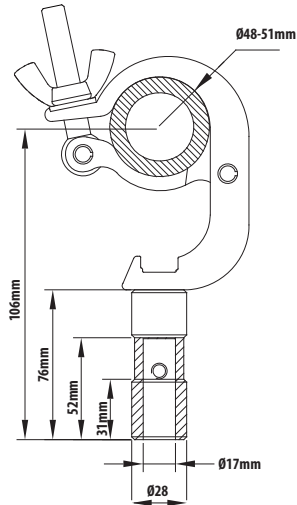


KCP-839
Handcuff TVMP Coupler

W 0.69kg Working Load Limit 200kg

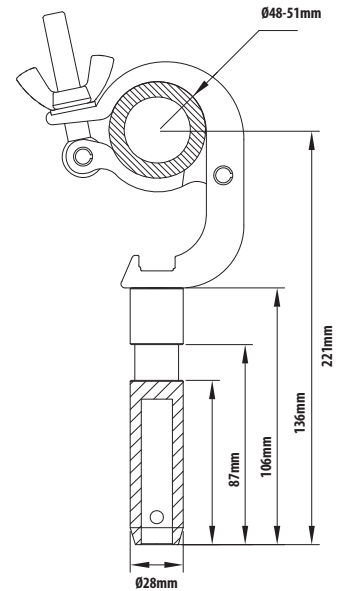


KCP-848
Handcuff 28mm Spigot Coupler

W 0.98kg Working Load Limit 200kg

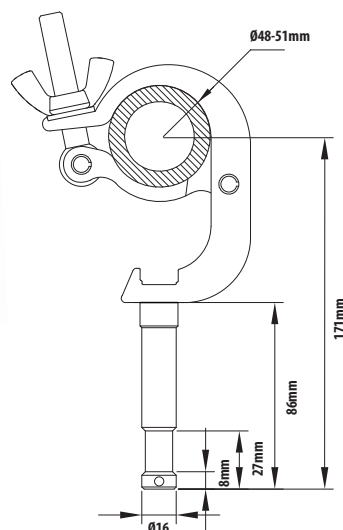

KCP-849
Handcuff 16mm Stud Couple

W 0.63kg Working Load Limit 100kg

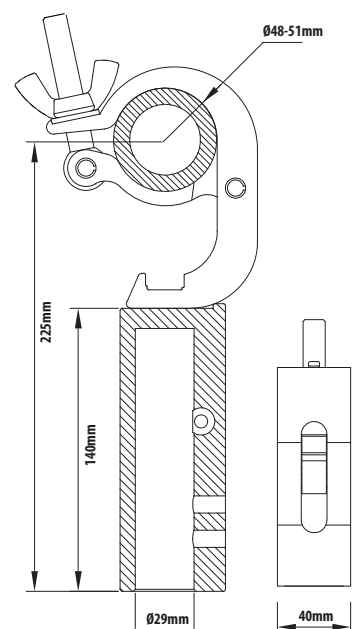

KCP-840
Handcuff Quick TV Coupler

W 1.05kg Working Load Limit 100kg

This is the slim profile of handcuff coupler, with the same great features but in just 25mm wide. It comes with M10 bolt and nut. The slim handcuff coupler has been TUV approval and certified with WLL 100kgs.



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

Captive on top of M12 threaded bolt to prevent wing nut from falling off in the air.

Save time and take less effort for rigging luminaire.


TUV approval with WLL 100kgs.

Fabricated of 6061-T6 high tensile aluminum extrusion for greatest durability.

Available in polished or black finish.


Design for Dia 48-51 mm tube system.

Double level's counter sunk for M10 hex. head bolt.

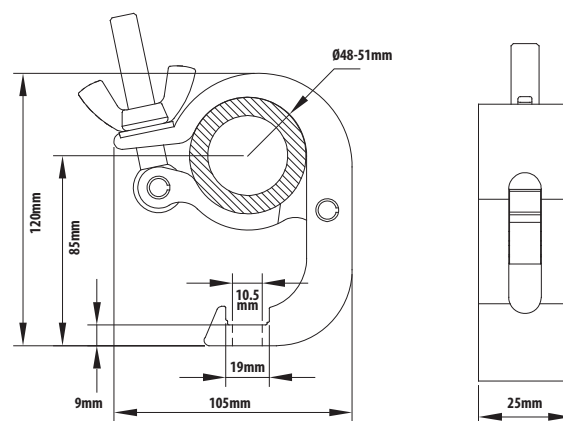


KCP-828 / KCP-828B Slim Handcuff Coupler

W 0.42kg Working Load Limit 100kg Bolt M12 x 38mm

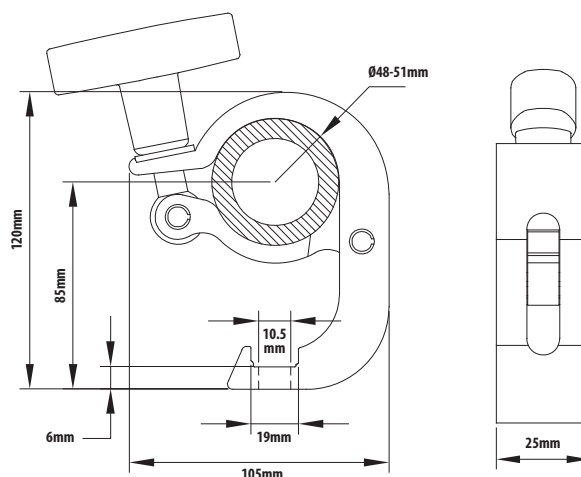


KCP-828-T / KCP-828B-T T-Handle Slim Handcuff Coupler

W 0.48kg Working Load Limit 90kg Bolt M10 x 38mm

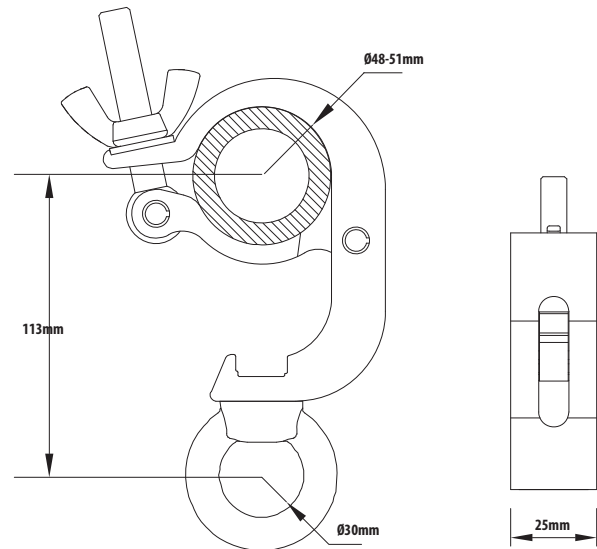


KCP-825 / KCP-825B Slim Handcuff Eye Ring Coupler

W 0.54kg Working Load Limit 85kg

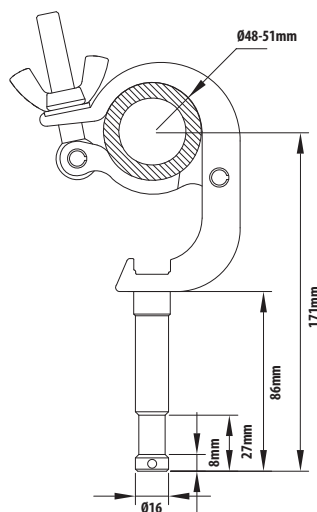

KCP-829
Slim Handcuff 16mm Stud Coupler W 0.48kg Working Load Limit 100kg

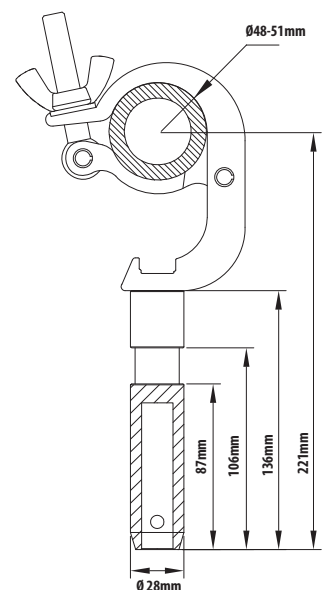

KCP-827
Slim Handcuff 28mm Spigot Coupler W 0.83kg Working Load Limit 100kg

Nugget coupler is designed for 1.25"~1.5"(32 mm to 38 mm) tube system. Aluminum-extruded construction makes it a tiny but sturdy rigging hardware. Sitting area is double level's countersunk for M10 or 3/8 hex bolt. Unique windows for safety wire access through. Hook strut of top opening section limits the open pace that offers assistance to rig, and two fitting bases let it become a multi-function coupler. TUV certified for single coupler and rated WLL 120 kg.



Fabricated of 6061-T6 high tensile aluminum extrusion for greatest durability.

Captive on top of M12 threaded bolt to prevent wing nut from falling off in the air.

Solid T handle provides comfort grip and operation with bare hand.

Available in polished or black finish.


Double level's counter sunk for M10 or 3/8"hex head bolt.

TUV approval with WLL 120kgs.

Feasible for tube diameter 32-38 mm (1.25"-1.5").





YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

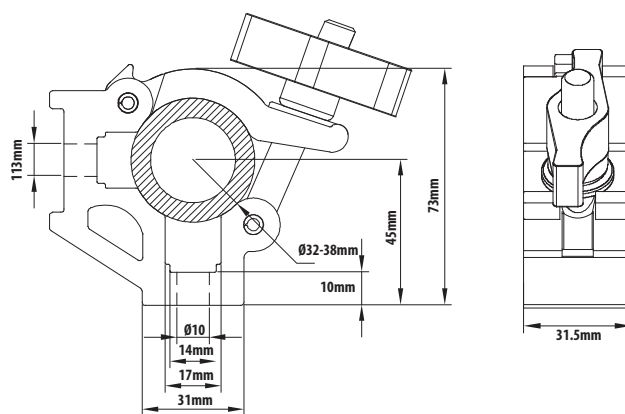



KCP-860 / KCP-860B Nugget Coupler

W 0.28kg Working Load Limit 120kg Bolt M10 x 30mm

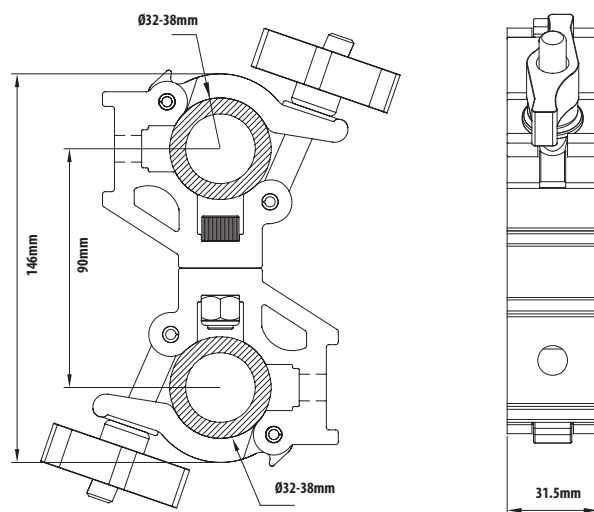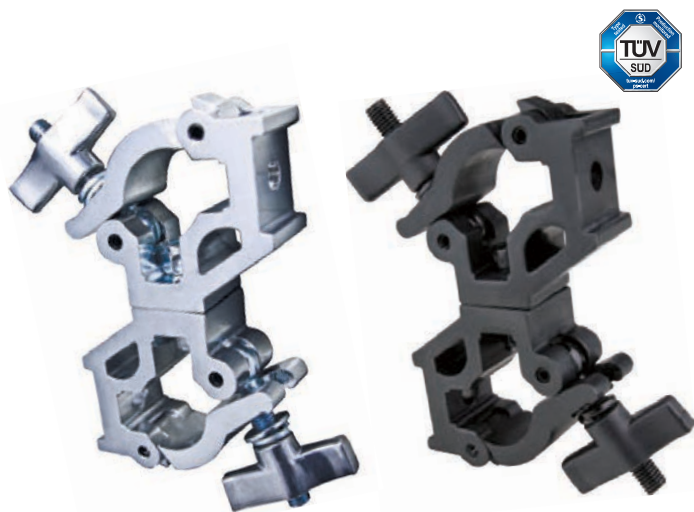


KCP-862 / KCP-862B Nugget Swivel Coupler

W 0.52kg Working Load Limit 120kg

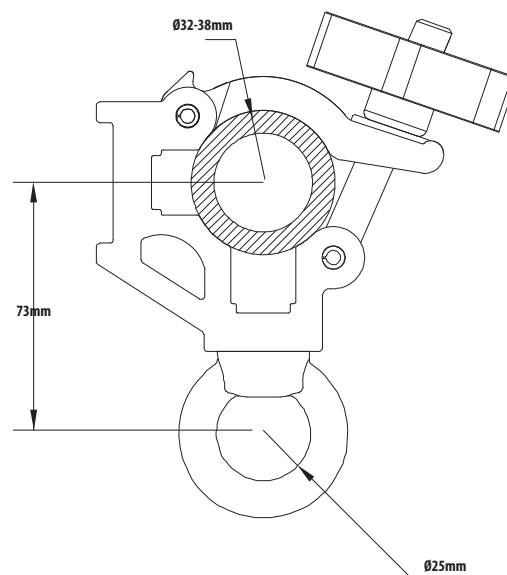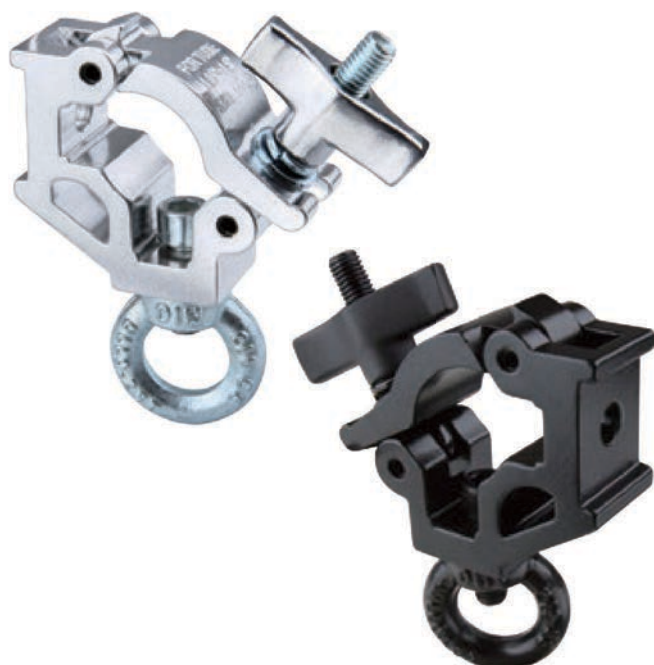

KCP-863 / KCP-863B Nugget Eye Ring Coupler

W 0.36kg ↓ 120kg

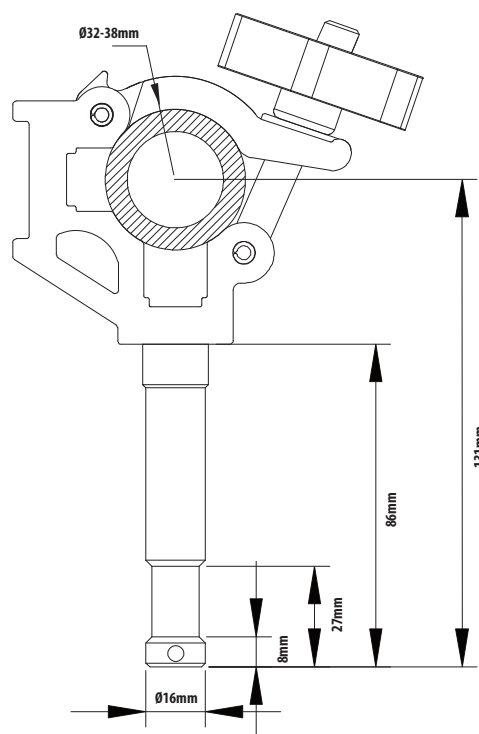

KCP-866 Nugget 16mm Stud Coupler

W 0.36kg ↓ 100kg

Arch coupler is constructed from aluminum gravity die casting, featuring a jaw opening for wider range of tube system from 38 mm to 51 mm. The handle of arch coupler is situated in the easily accessible horizontal position, leaving user to fasten the coupler without across the truss brace. Ergonomic big handle protects user's palm from the obstructive bolt. Double countersunk design for alternative usage of M10 or M12 hex bolt. It is TUV certified and rated WLL 150 kg.




YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

Available in polished or black finish.

TUV approval with WLL 150kgs.


Feasible for tube diameter 38-51 mm.

Double level's counter sunk for M10 or M12 hex head bolt.

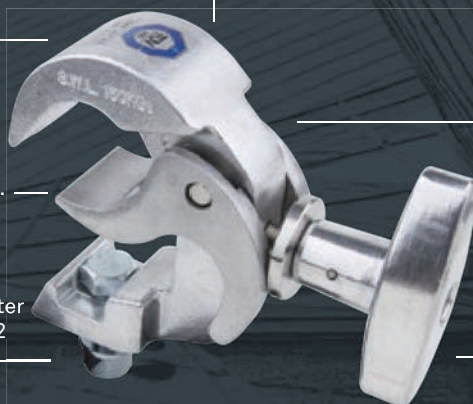


Constructed of gravity die-cast aluminum for greatest durability.

Solid T handle provides comfort grip and operation with bare hand.

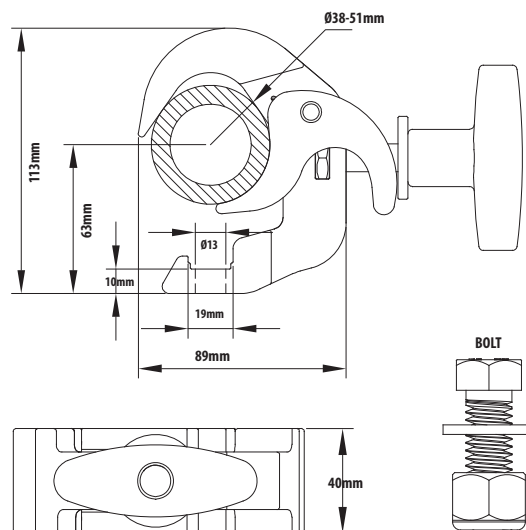


KCP-810 / KCP-810B Arch Coupler
Recommend vertical loads with coupler.

W 0.68kg ↓ 150kg Bolt M12 x 38mm

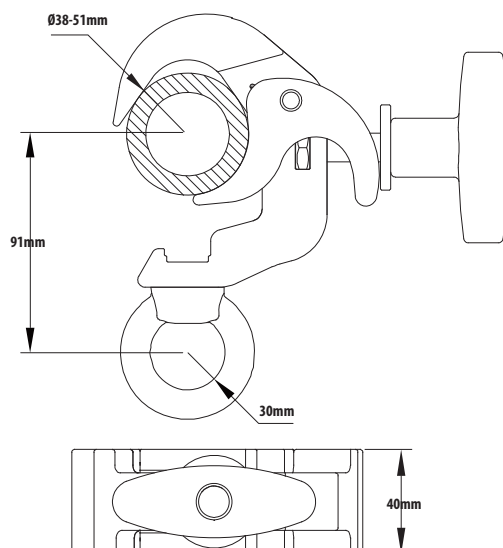


KCP-813 / KCP-813B Arch Eye Ring Coupler

W 0.79kg ↓ 75kg

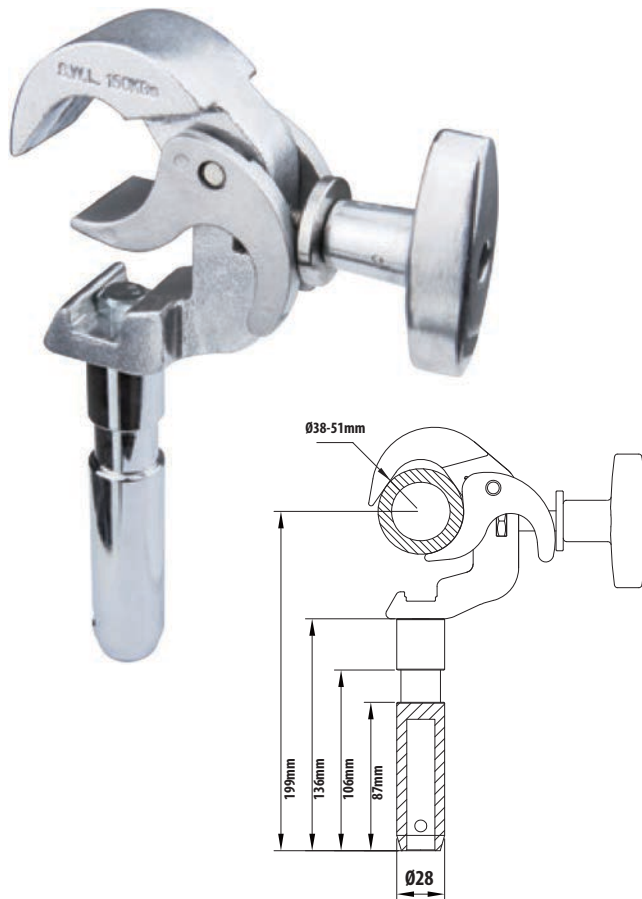

KCP-814
Arch 28mm Spigot Coupler

W 1.10kg Working Load Limit 150kg

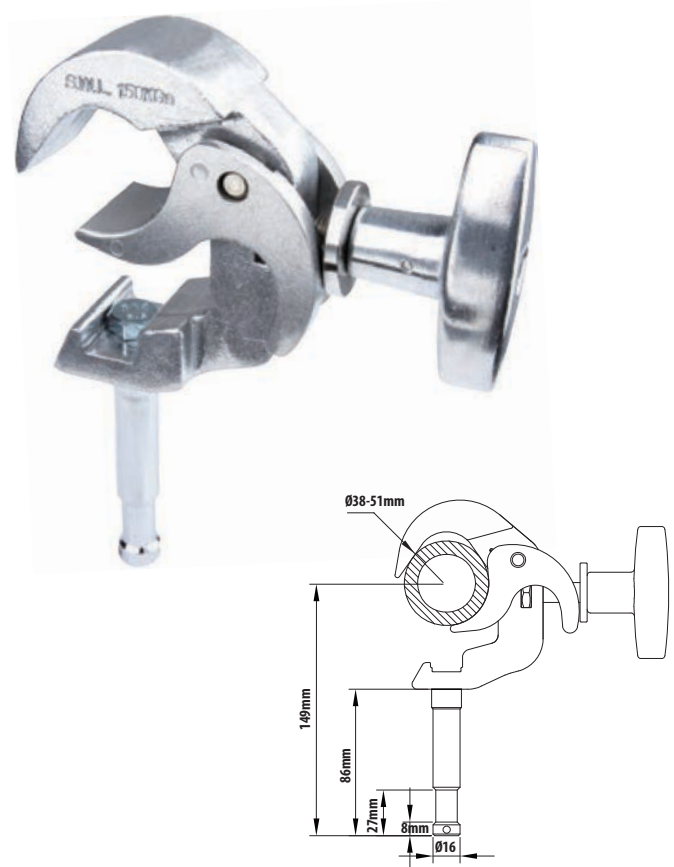


KCP-816
Arch 16mm Stud Coupler

W 0.75kg Working Load Limit 100kg



KCP-841 Arch Quick TV Coupler

W 1.38kg Working Load Limit 100kg

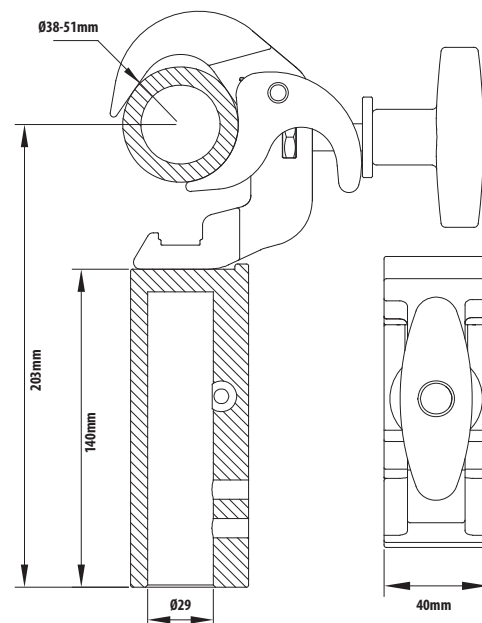

Mighty coupler is constructed from high tensile aluminum alloy extrusion for greatest durability. It is ideal to fit tube diameter up to 60mm.




Captive on top of threaded bolt to prevent wing nut from falling off in the air. —

Fabricated of 6061-T6 high tensile aluminum extrusion. —

Feasible for tube diameter 48-60mm. —


TUV Certified

M10 countersunk square bolt for effortless operation. —

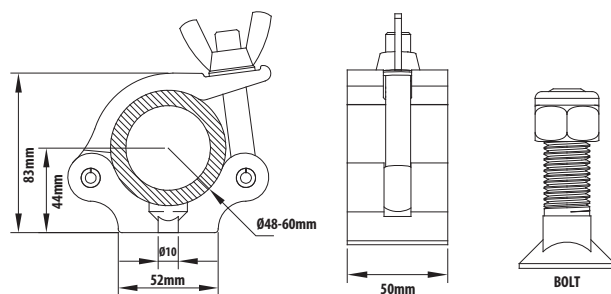


KCP-851 / KCP-851B Mighty Coupler

W 0.55kg ↓ 280kg Bolt M10 x 40mm Square Counter Sunk

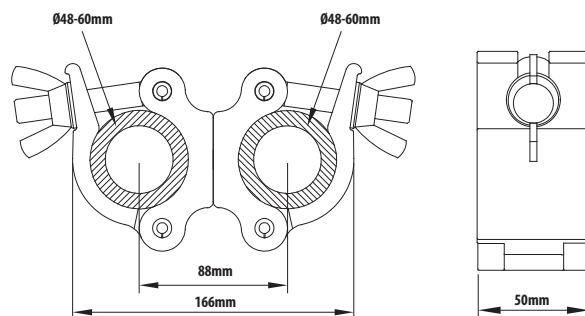


KCP-852 / KCP-852B Mighty Swivel Coupler

W 1.10kg ↓ 140kg

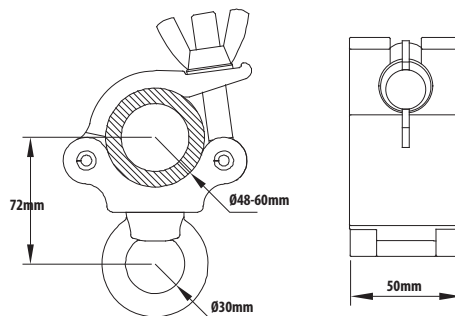


KCP-853 / KCP-853B Mighty Eye Ring Coupler


W 0.7kg ↓ 340kg M12 Eye Ring

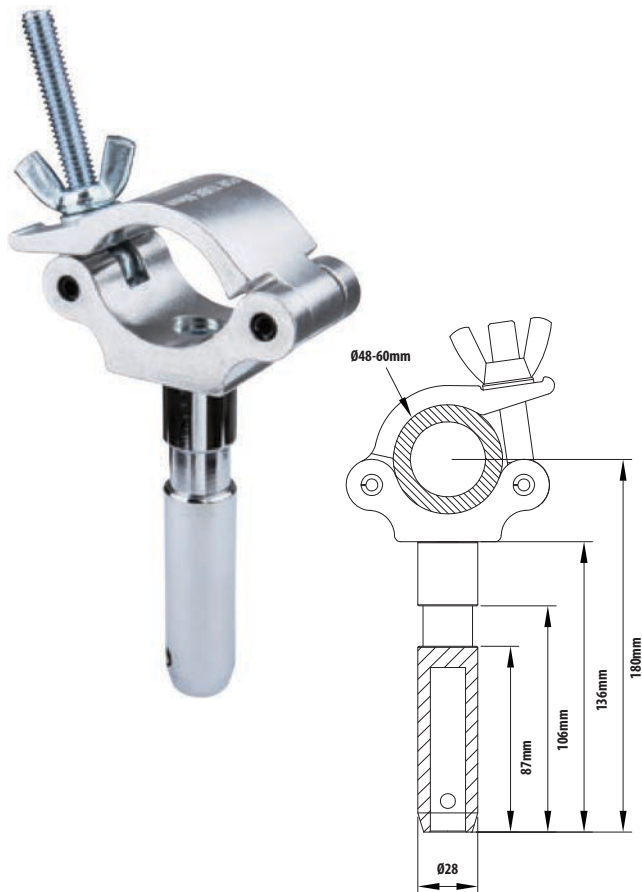


KCP-854
Mighty 28mm Spigot Coupler **W** 0.99kg **↓** 200kg

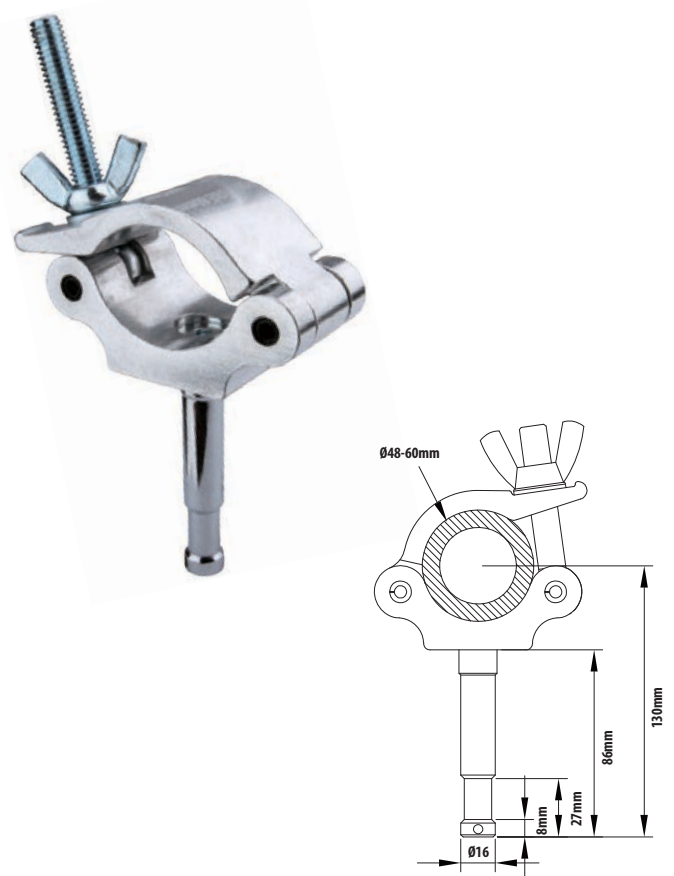

KCP-856
Mighty 16mm Stud Coupler **W** 0.64kg **↓** 100kg

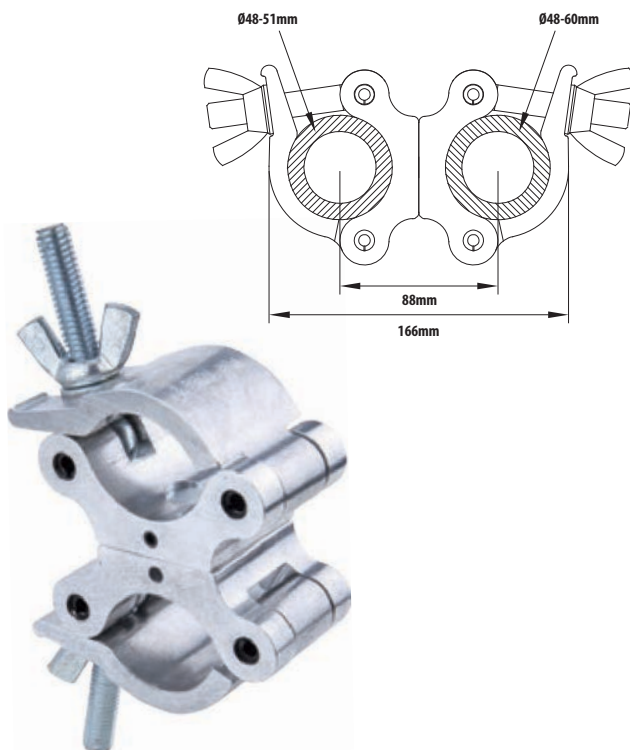

KCP-857 Mighty Swivel Coupler
for 60mm to 48-51mm **W** 1.25kg **↓** 500kg

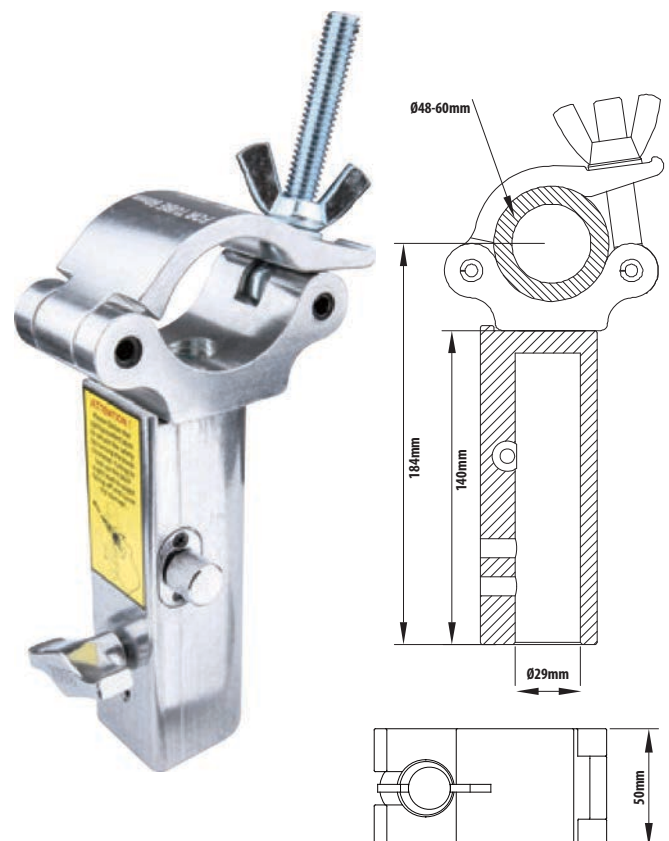

KCP-877
Mighty Quick TV Coupler **W** 0.64kg **↓** 100kg

Constructed from high tensile 6061-T6 aluminum and carries the same features as mighty coupler, but comes in just 30mm wide for better rigging utility.



Captive on top of threaded bolt to prevent wing nut from falling off in the air.



Fabricated of 6061-T6 high tensile aluminum extrusion.

TUV Certified

Feasible for tube diameter 48-60mm.


Available in polished or black finish.

M10 countersunk square bolt for effortless operation.

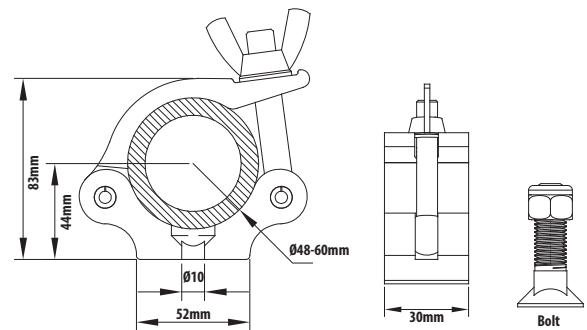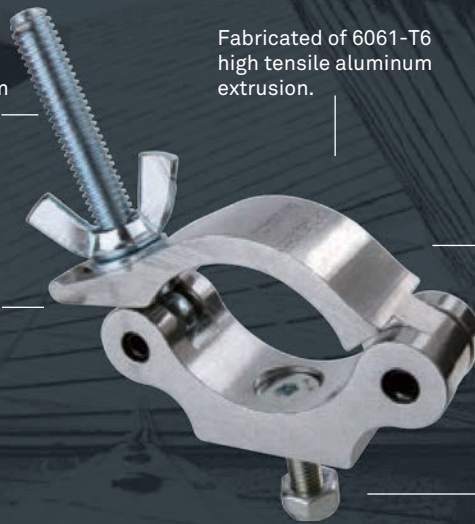


KCP-850 / KCP-850B Slim Type Mighty Coupler

W 0.38kg Working Load Limit 170kg Bolt M10 x 40mm Square Counter Sunk

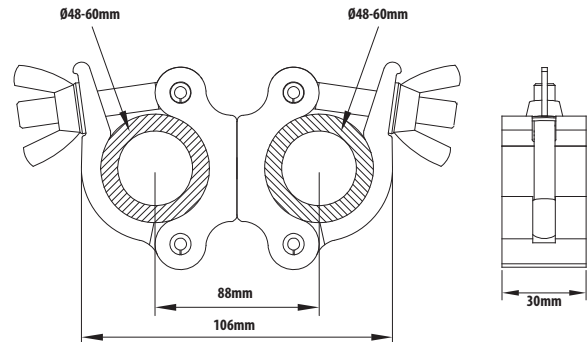


KCP-858 / KCP-858B Slim Type Mighty Swivel Coupler

W 0.74kg Working Load Limit 140kg

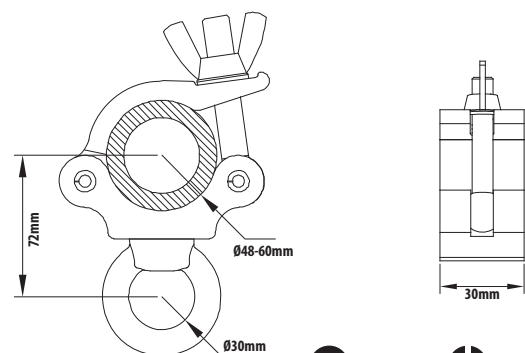


KCP-859 / KCP-859B Slim Type Eye Ring Might Coupler

W 0.53kg Working Load Limit 160kg

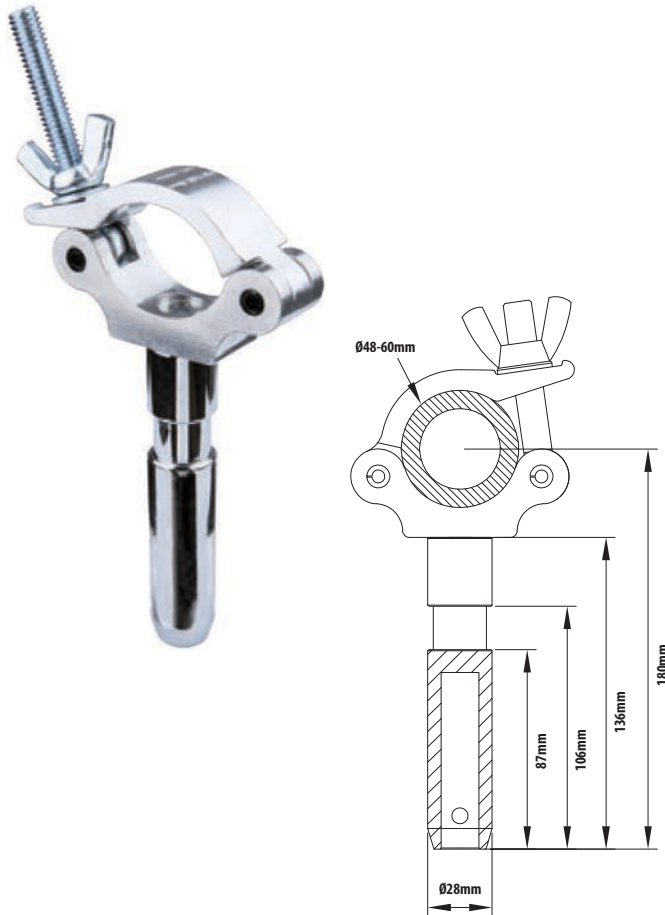


KCP-864 Slim Type Mighty
28mm Spigot Coupler

W 0.83kg Working Load Limit 200kg

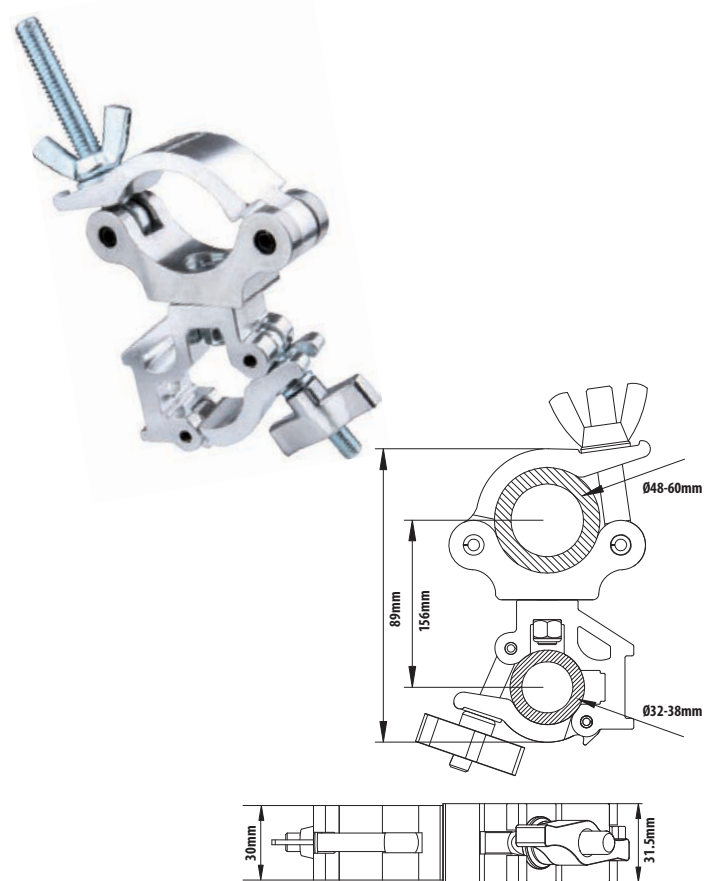


KCP-869 Slim Type Mighty Swivel
Coupler for 60mm to 1.25"-1.5"

W 0.62kg Working Load Limit 120kg

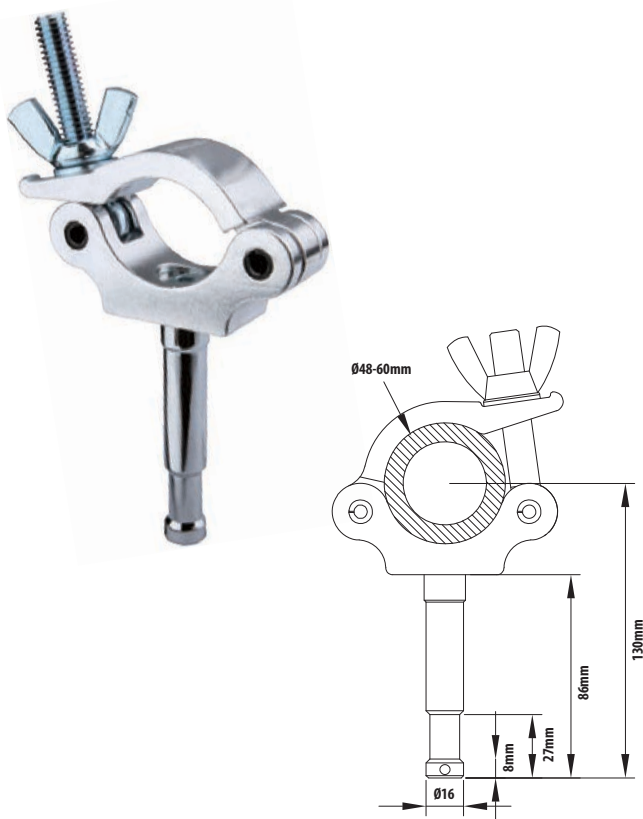

KCP-867 Slim Type Mighty
16mm Stud Coupler

W 0.47kg Working Load Limit 100kg

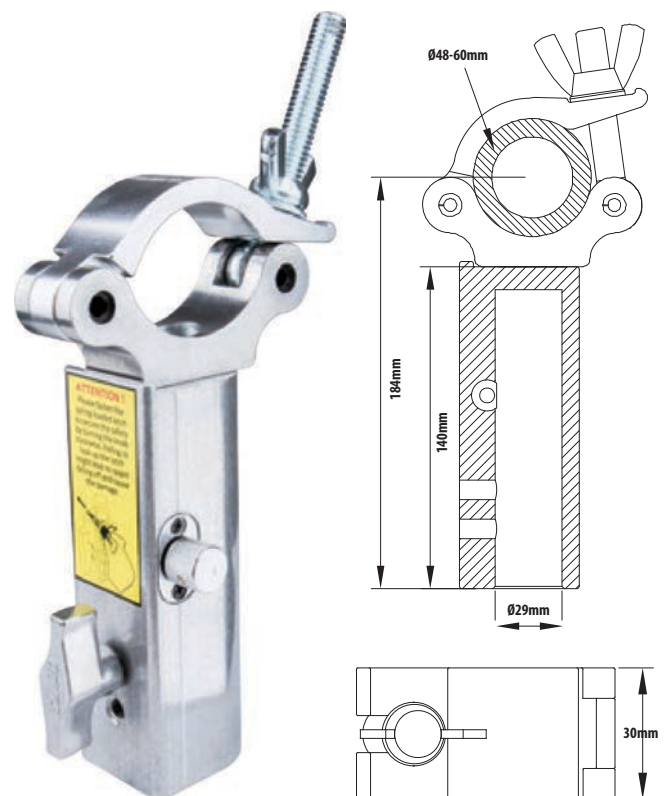

KCP-878 Slim Type Mighty
Quick TV Coupler

W 1.01kg Working Load Limit 100kg

Mighty Handcuff Clamp is constructed from high tensile 6061 aluminum extrusion. It is one of the most popular rigging hardware in the industry. Thanks to triggering mechanical design, this clamp is made to help the person rig heavy luminaries with less effort and saving much working time.



Feasible for tube diameter 48-60mm.

Working Load Limit 100kgs (Width 25mm) Mighty Slim Handcuff.

SLIM MIGHTY HANDCUFF


Captive top of M12 threaded bolt to prevent wing nut from falling off in the air.

Fabricated of 6061-T6 high tensile aluminum extrusion for greatest durability.


Feasible for tube diameter 48-60mm.

Working Load Limit 200kgs (Width 40mm) Mighty Handcuff.

Double level's counter sunk for M10 or M12 hex head bolt.

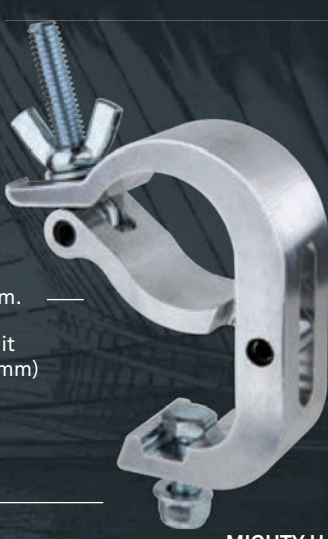


MIGHTY HANDCUFF

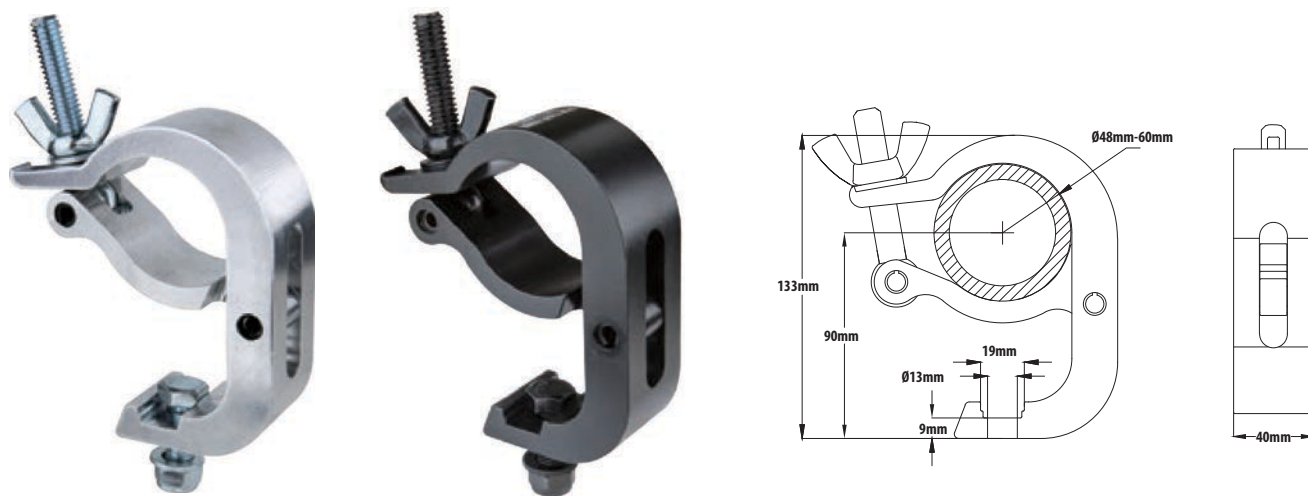


KCP-881 / KCP-881B Mighty Handcuff Coupler

 0.65kg
  200kg
  M12 x 38mm

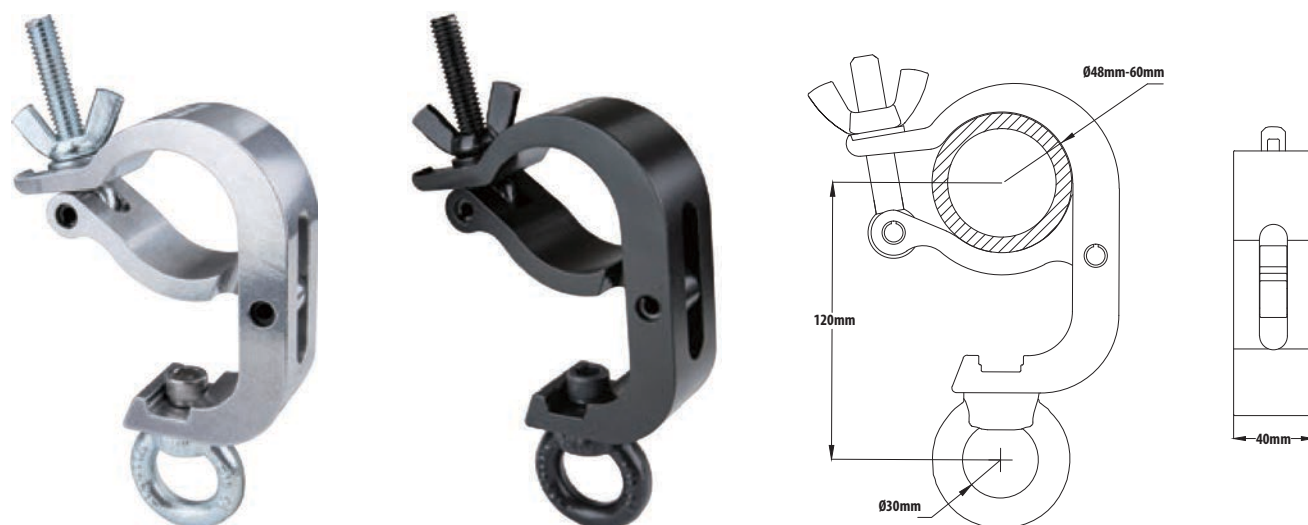


KCP-883 / KCP-883B Mighty Handcuff Eye Ring Coupler

 0.78kg
  200kg

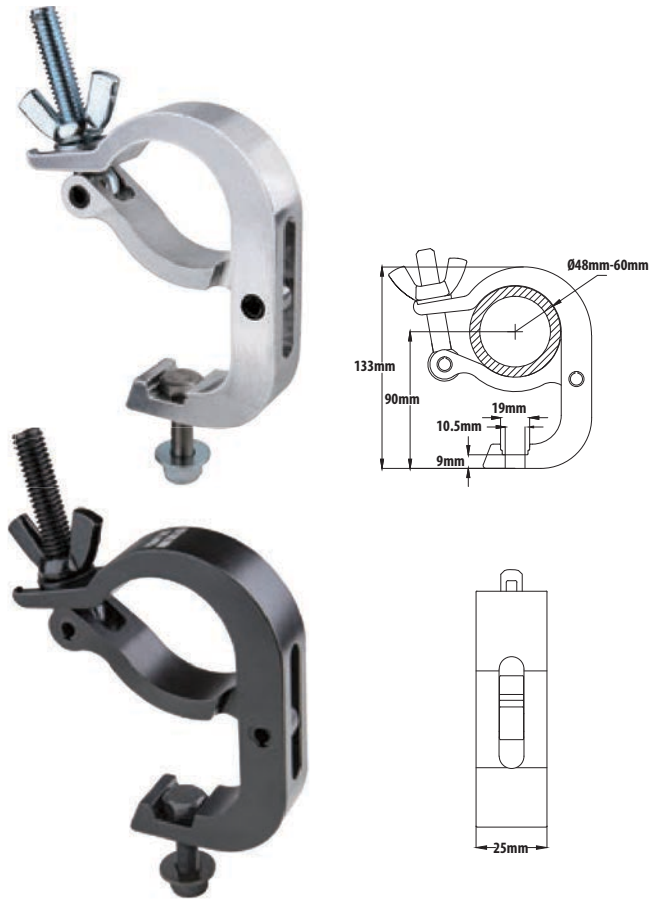


KCP-880 / KCP-880B
Slim Mighty Handcuff Coupler

W 0.42kg ↓ 100kg
M10 x 38mm

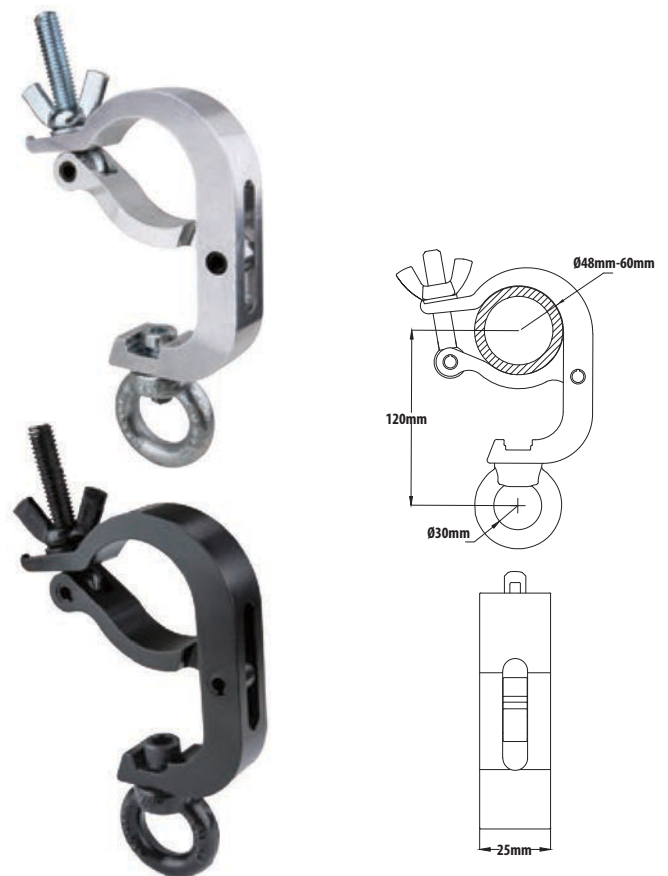


KCP-882 / KCP-882B
Slim Mighty Handcuff Eye Ring Coupler

W 0.53.kg ↓ 100kg

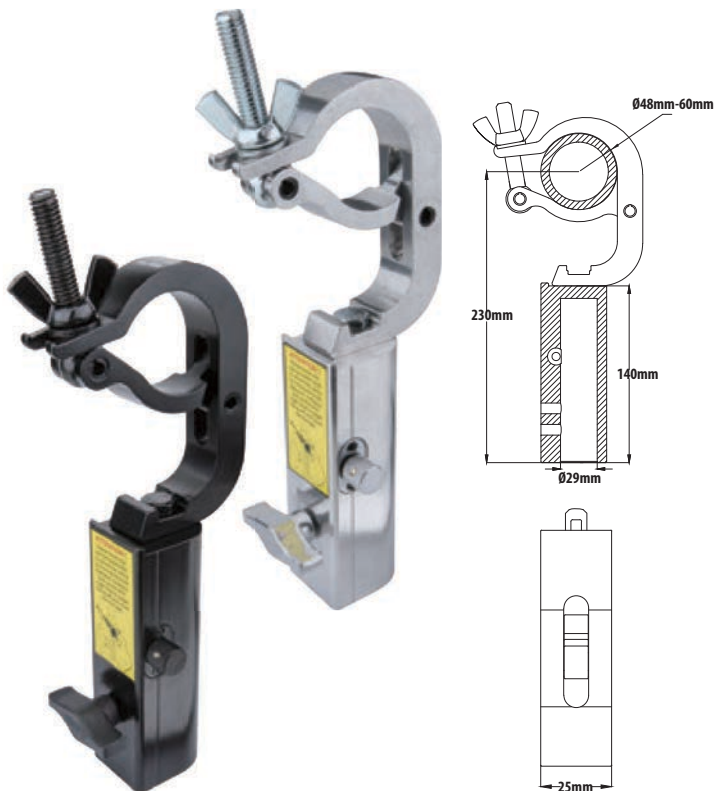

KCP-884 / KCP-884B W 1.05kg ↓ 100kg
Slim Mighty Handcuff Quick TV Coupler

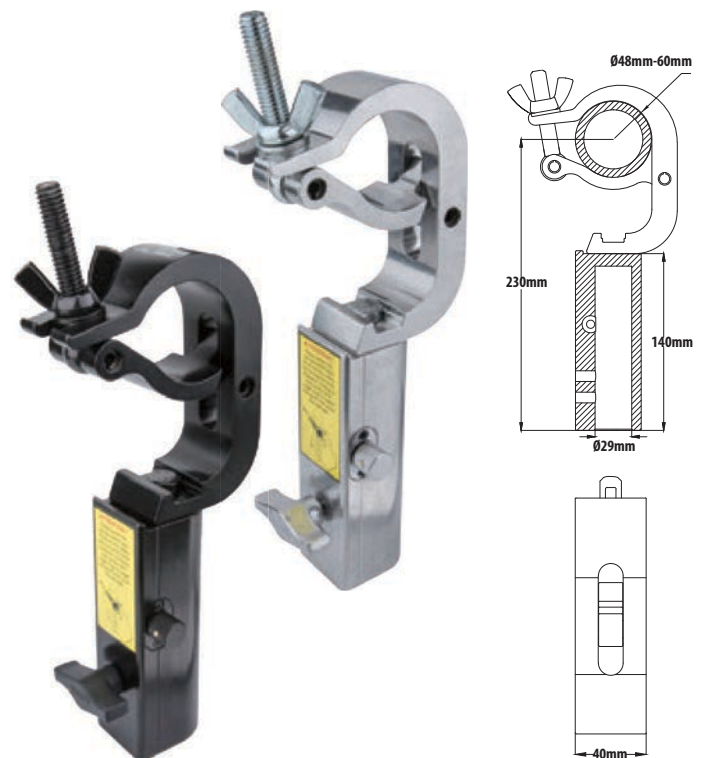

KCP-885 / KCP-885B W 1.28kg ↓ 100kg
Mighty Handcuff Quick TV Coupler

TV Coupler is made to hook up the lighting equipment for Film, and TV/Studio. It comes with a 16mm and a 28mm spigot receivers, plus a movable 16mm stud for maximum utility. The "safety linchpin" activates as security device allowing the luminaire keeps rotating but free from drop-off before the luminaire is tightened up by knob. TUV certified with WLL 300kg rated.



TUV Certified



YOUTUBE
TUV CERTIFIED
CLAMP & COUPLER

Load capacity of 300kgs on 28mm attachment, and 40kgs on 16mm attachment.


Constructed by rugged aluminum gravity casting.

Movable 16mm baby stud (3/8" threaded) for lightweight luminaires or accessories.

28mm junior socket for luminaire or telescopic hanger.

Linchpin attached with a bonding wire to keep luminaire secured for pan adjustment while the knob of clamp is loosen.

Feasible for tube dia. 48-51mm.



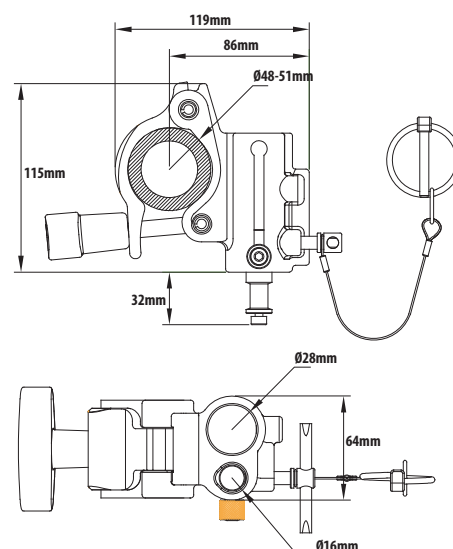


KCP-844 / KCP-844B TV Coupler

 0.32kg

 300kg on 28mm attachment


 40kg on 16mm attachment

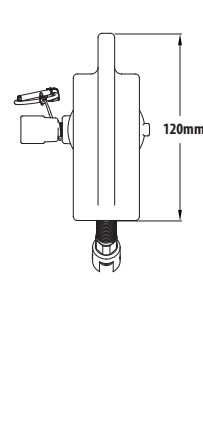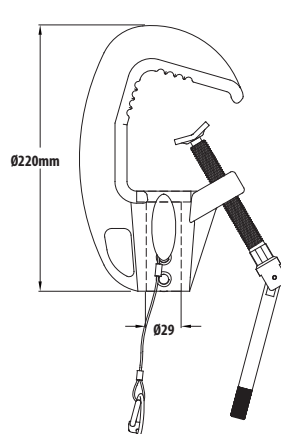

KCP-100B TV Clamp  1.16kg  250kg

The KCP-100B TV Clamp is a heavy duty casting C clamp and supplied with a Tommy bar to improve grip. It terminates in a 28 mm (1-1/8") junior receiver. Collar ring on bushing for supplied safety linch pin to pass through fixture spigot. There is a dedicated aperture in clamp body for attaching safety cable. This clamp works for diameter 22-54 mm round tube with load capacity 250 kgs. It is ideal to hang all types of luminaires in TV studio and theaters.


Designed with ratcheting jaw to fit wider tube range, these two pipe C clamps work for tube diameter from 28mm (1-1/8") to 78mm (3"). Manufactured from rugged gravity cast aluminum for greater load capacity. TUV certified for working safe.

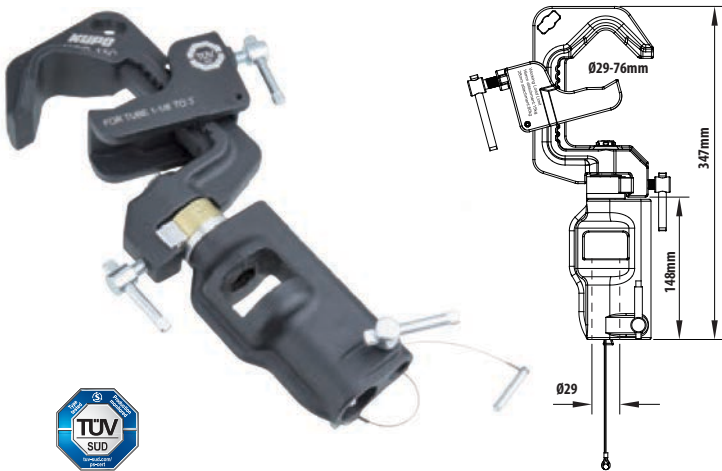

KCP-150 Swiveling Pipe C Clamp

W 2.1kg Working Load Limit 15kg (16mm stud) / 80kg (28mm receiver)

Swiveling Pipe C Clamp with Universal Head.

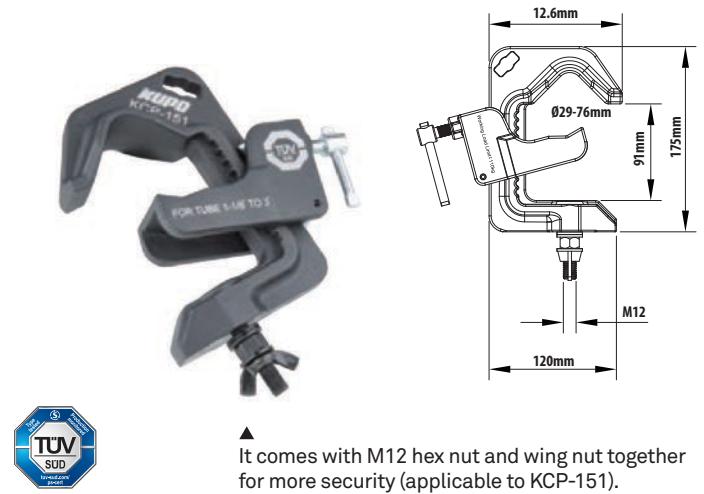

KCP-151 Ratcheting Jaw C Clamp

W 1.2kg Working Load Limit 110kg

Ratcheting Jaw C Clamp With M12 Bolt & Nut.

▲ It comes with M12 hex nut and wing nut together for more security (applicable to KCP-151).



Spring-loaded ratcheting jaw helps to adjust the opening to fit the tube diameter.



The swivel device allows to have a pan adjustment of the fixture with ease and convenience.



Dedicated hole on the clamp is for attaching safety cable more handy.

◀ Universal head is made with three attachment: 28mm junior receiver, 16mm baby receiver, and 16mm baby stud; the knob and safety pin are built with binding wire to ensure essential safety aid is always on hand (applicable to KCP-150).





Lighting Clamp Ft. Universal TV Quick Receiver for 28mm spigot

Universal Quick Receiver is designed for accommodating diameter 28mm DIN and EURO spigot, which most of TV or studio lighting luminaires are equipped. Spring latch activates immediately while the spigot gets in, and several turnings with knob cements the safety further. This quick receiver can be used with diverse lighting clamps for grid or truss diameter from 2" to 60mm, and ideal for TV studios, theatres and entertainment venues.

YOUTUBE

LIGHTING CLAMP
FT. UNIVERSAL TV QUICK RECEIVER

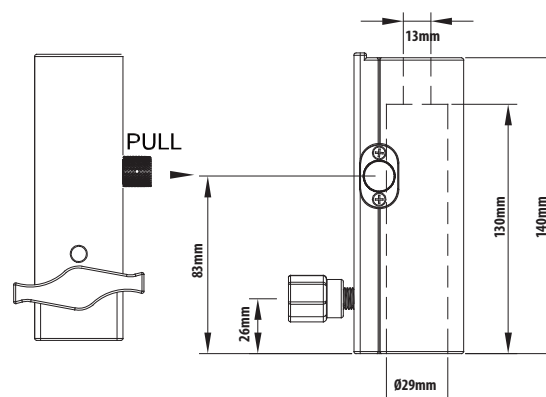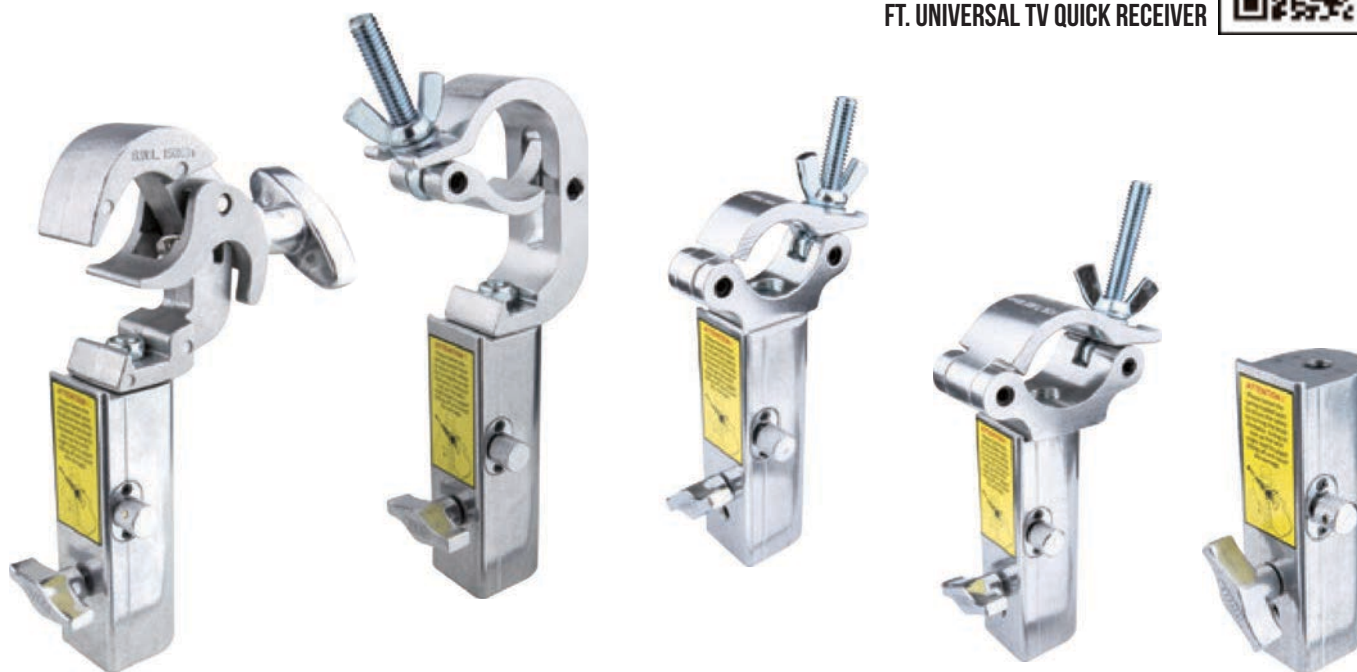

KS-089 / KS-089B


Universal TV Quick Receiver



0.7kg



100kg

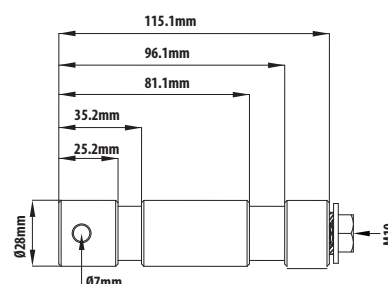

KS-034

Solid steel 28 mm TV spigot tapped for M10 screw with washer.

The Convi clamp, is made of lightweight cast alloy, can be securely mounted on any tube from 5 to 51mm and equipped with a saddle for mounting on to flat surfaces. The elastic P.U. pad also reduces surface damage and enhances gripping action. All metal parts are made of stainless steel for sturdier and anti-rusted features. The die-casting aluminum of locking knob provides with most rugged advantage. With built-in female socket allows the use of any attachments to hold anything from backgrounds to lighting fixtures. The spring safety locking system also offers double insurance while the screw locking action is not completely finished.



TUV certified with rated WLL 20kg.



YOUTUBE
KUPO SUPER CONVI CLAMP
SYSTEM (KCP-700 & KCP-710)

Made of die-casting aluminum alloy, light-weight yet robust.


Feasible for tube dia. 5-51mm or flat material (when use with saddle mount).

Stainless steel parts ensure rust-free and durable.



Solid aluminum knob for greatest comfort grip.


Receiver for wide ranges of 16mm attachment; spring locking keeps the attachment secured before the knob tightened up.

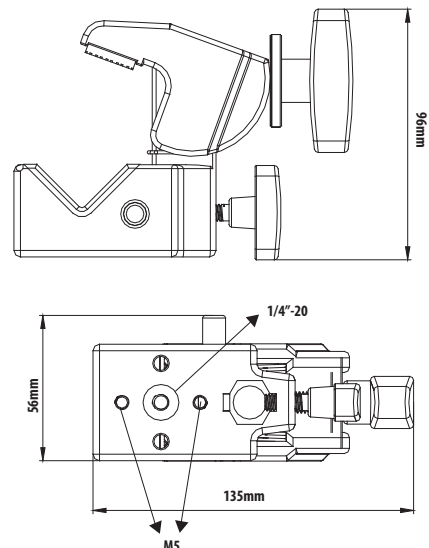

KCP-700 / KCP-700B Super Convi Clamp

W 0.45kg

20kg

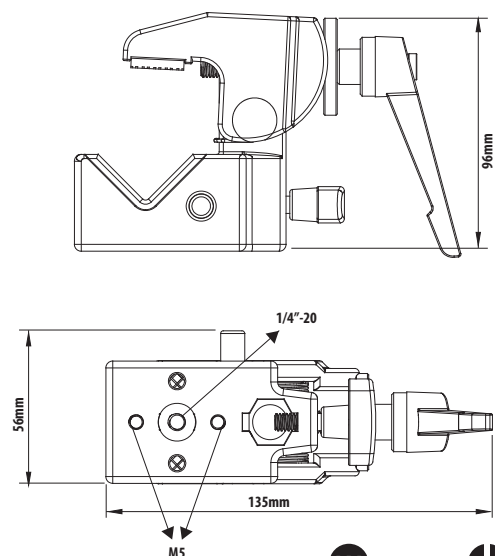

KCP-710 / KCP-710B Super Convi Clamp w/ Ratcheted handle

W 0.45kg

20kg




KCP-720 / KCP-720B

Super Convi Clamp w/ Ratcheted handle **W** 1.09kg
Assembled by two Super Convi Clamps provides a 90 degree angle and perfect for supporting a crossbar for background on kupoles.



KCP-7SDL

Super Convi Clamp Saddle **W** 0.01kg
Allow to use the clamp on most flat Surface such as a table without a tool. Set for four.

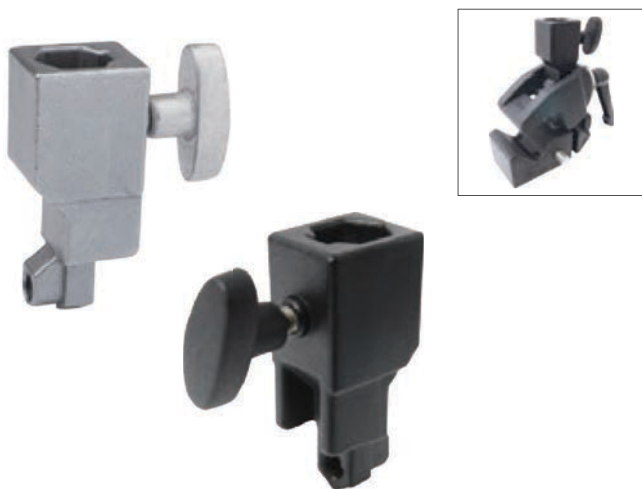

KD-730 / KD-730B

Super Convi Clamp Double Socket **W** 130g
Offer an additional 5/8" (16mm) socket to Super Convi clamp.



KS-019 Swivel Extension Arm




KS-004 M12 x 30 Stud



KS-005 M10 x 25 Stud



KS-018 5/8" (16 mm) Stud w/M10 thread

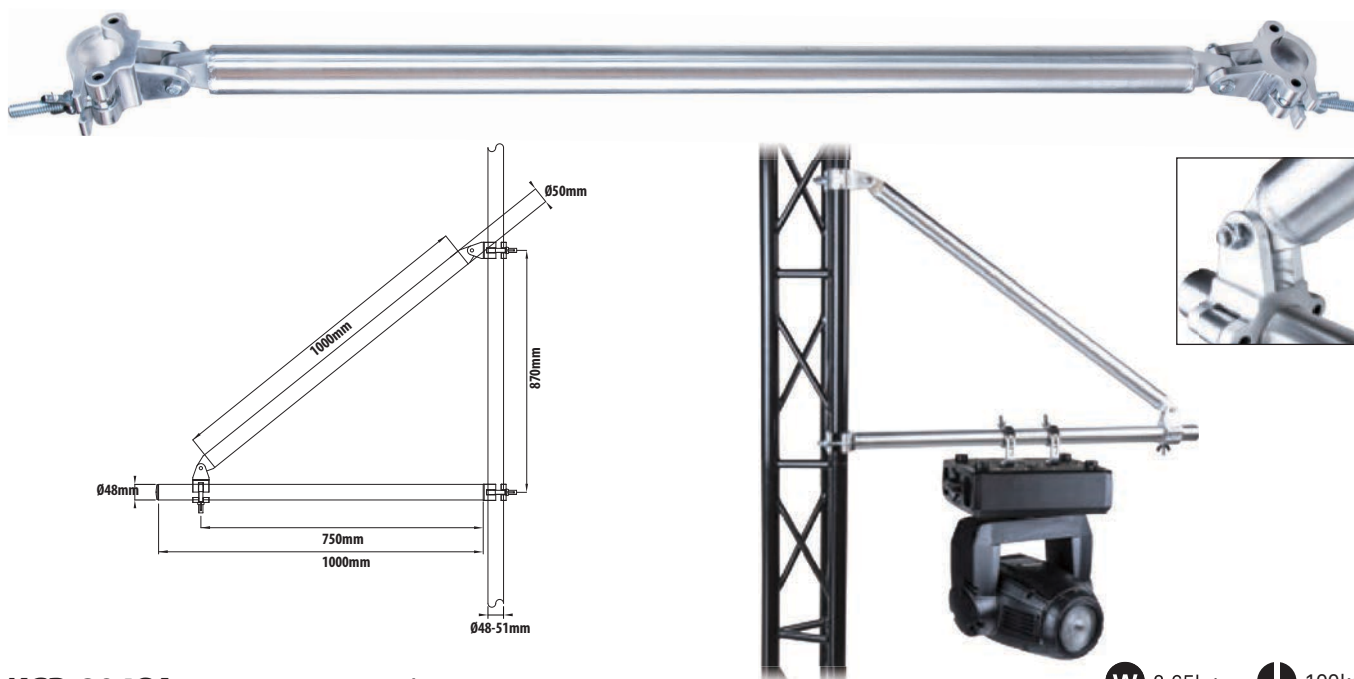

KCP-804SA Support Arm Coupler

Support arm coupler is made with two articulating joints, making it flexible for most mounting need. It holds vertical and horizontal tubes firmly, offering stable support to each other and eliminating the movement. Ideal for rigging a heavy luminaire or object from truss where a supportive device is needed.

W 2.65kg ↓ 100kg




KCP-804HB Heavy Duty Arm Coupler

Strengthen by thick gauge triangular support plate and welded with prolonged aluminum body, this heavy duty arm coupler enhances the loading capacity by two times heavier than the ordinary arm coupler for up to 50kg. Fitted with dia. 48mm aluminum alloy tube and overall length 100cm. Made in black finish.

↓ 50kg

Arm coupler is firmly welded with 48mm aluminum alloy tube, creating an extension and flexible rigging point for lighting fixture. Feasible for tube diameter 48-51mm, and available in polished and black finish.

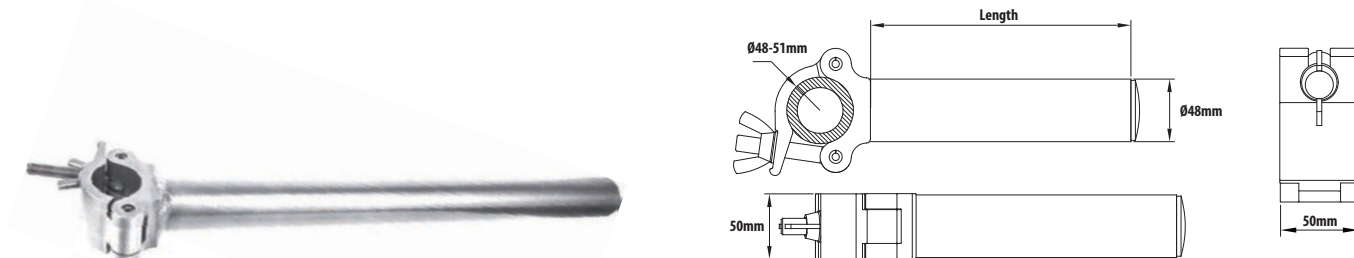

KCP-801 / KCP-801B Arm Coupler

Length: 250mm / Weight: 0.85kg / Safe working load: 80kg

KCP-802 / KCP-802B Arm Coupler

Length: 500mm / Weight: 1.20kg / Safe working load: 40kg

KCP-803 / KCP-803B Arm Coupler

Length: 750mm / Weight: 1.55kg / Safe working load: 37kg

KCP-804 / KCP-804B Arm Coupler


Length: 1000mm / Weight: 1.90kg / Safe working load: 25kg

Pipe-to-pipe coupler offers a firm connection between two parallel tubes, and also for 90 degree crossover tubes. Feasible for tube diameter 48-51mm, and available in polished and black finish.



Parallel

DP

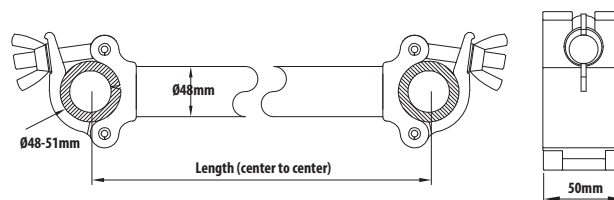

KCP-801-DP / KCP-801-DB Pipe-to-pipe Coupler

Length: 250mm / Weight: 1.25kg / Safe working load: 200kg

KCP-802-DP / KCP-802-DB Pipe-to-pipe Coupler

Length: 500mm / Weight: 1.60kg / Safe working load: 200kg


KCP-804-DP / KCP-803-DB Pipe-to-pipe Coupler

Length: 1000mm / Weight: 2.30kg / Safe working load: 200kg



Cross

XP

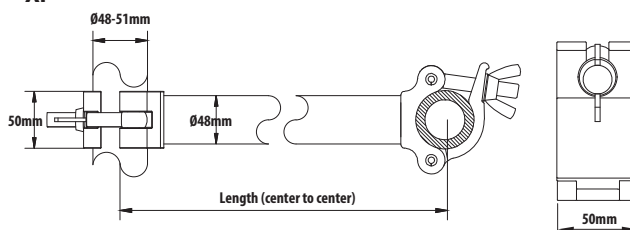

KCP-801-XP / KCP-801-XB Pipe-to-pipe Coupler

Length: 250mm / Weight: 1.25kg / Safe working load: 200kg

KCP-802-XP / KCP-802-XB Pipe-to-pipe Coupler

Length: 500mm / Weight: 1.60kg / Safe working load: 200kg


KCP-804-XP / KCP-803-XB Pipe-to-pipe Coupler

Length: 1000mm / Weight: 2.30kg / Safe working load: 200kg



KCP-847 Barrel Joiner 0.96kg 300kg


Tube / Barrel joiner is made for providing quick connection for two tubes together end to end.

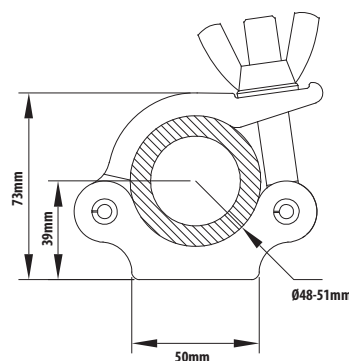



KCP-870 Fast-Lock Omega Clamp W 0.45kg ↓ 50kg

Made with thick gauge black-paint steel with 1/4 turn fasteners. Designed for Clay Paky's Axcro, K-EYE, B-EYE, Mythos, Sharpy, Scenius and other moving lights.

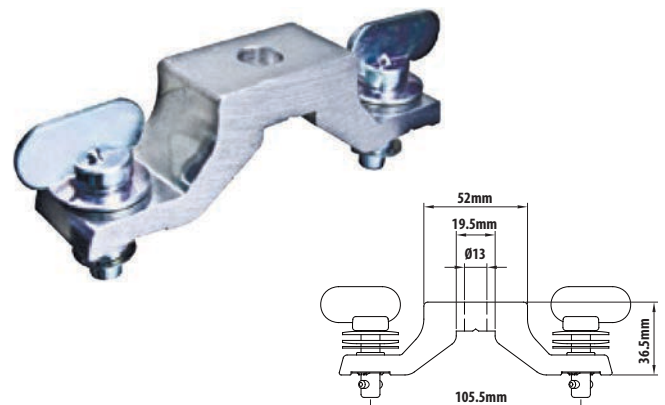

KCP-872 Moving Light Bracket W 0.26kg ↓ 75kg

Moving light bracket is feasible with Martin moving lights. It is equipped with two 1/4 turn fasteners. The central hole fits M12 or 1/2" bolt.



TL-17 Tool Lanyard

Preventing tools from falling accidentally when working high up in the air.

- Retractable tool lanyard with 2 lock snaps & fixed loop.
- Bungee rope helps to absorb the shock of a dropping tool.
- Prevent injury from failing tools.




17mm (Width) Tool Lanyard, Black
Working Length: from 74 to 137cm
Max Working Capacity: 3kg

- Avoid dropping tools and increase productivity.
- Quick release buckle clip for quick on/off and secure attachment.
- Tangle-free while use with other lanyards, and keep tethered tool move freely.



WS-140 Wingnut Multi (Spanner)

Constructed by carbon steel and engineered for rigging demand, this smart gadget offers you the maximum versatility with greatest durability. Fabricated for M8, M10 and M12 with cross holders for wingnut and setscrews and built to meet the most common needs in the professional rigging industry. Palm-size and extremely lightweight. Spring hook for attaching the tool to your belt makes this must-have multi spanner easy storage and transportation.

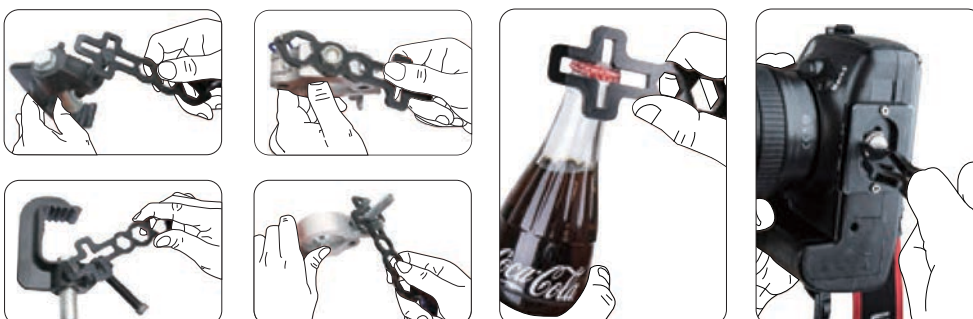

Key features included:

- 3 x Hex Bolt
- 2 x WingNut
- 2 x SetScrew
- 1 x Key Chain
- 1 x Bottle Opener
- 1 x Flat Screw Driver

Display couplers are built to provide convenient settlement of marketing material for trade fairs, where 2" tube truss is commonly accommodated but lack of ideal accessories to use with. Display Couplers are just made to satisfy such demand. Fabricated of burger coupler for 2" tube system. It is featuring light weight and sturdy profile, covering up wide ranges of trade show's demand, quick settlement and less tool required. It also helps your booth up with refreshing looks in chic and stylish design.




KCP-901-PC Panel Clamp

- For gripping material up to 0.8mm thickness, rendering a handy and easily fixing method for holding materials.
- For gripping material up to 0.8mm thickness.



KCP-901-CH Catalogue holder

- Combined with L-shape rack, turning this to be a robust and portable catalogue shelf on the go. 25cm (W) x 20cm (D) x 25cm (H).
- With book shelf (25cm / W x 20cm / D x 25cm / H).

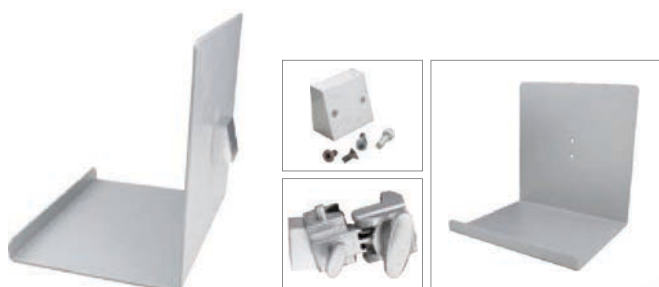

KD-742P Book Shelf

- 25cm W x 20cm D x 25cm H
- Maximum load 9 kg
- Mounting on KCP-700



KD-743P Catalogue Shelf


- 25cm W x 8.6cm D x 25cm H
- Maximum load 9 kg
- Mounting on KCP-700




KCP-901-PH Poster Hanger

- With tool-free combination of dia. 25mm banner rod (length 61cm) and hex screw, poster can be conveniently demonstrated. Rig the poster anywhere 2" tube is available.
- With dia. 2.5mm banner rod (rod length 61cm).

Application

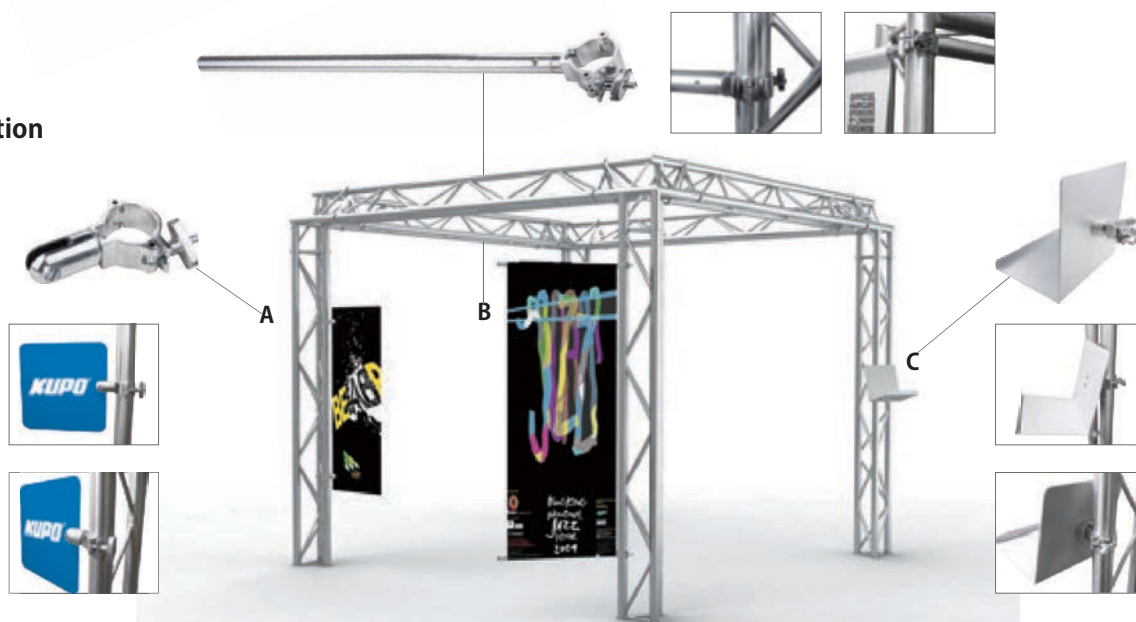



Side arm provides a convenient rigging position for the luminaire to attach on the truss or pipe. One side is assembled with a classic aluminum alloy coupler and the other is fitted with 16mm stud, or 16mm receiver, or 28mm receiver. Chrome-plated and robust square extension pole for the greatest durability.

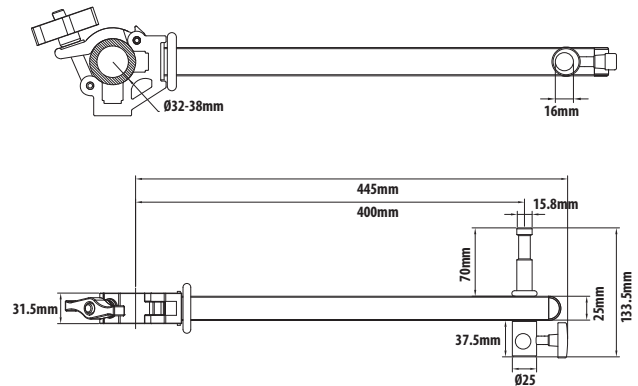

KCP-806 Side Arm with Baby Pin / Receiver

20kg


he same function as KCP-808 but specially design for tube size from 31mm (1.25") to 38mm (1.50"). For example, it can fit into C-stand tube size 35 mm (1.4"). With the welding adapters included one baby pin and baby receiver, it off ers the flexibility of connecting the small lighting fi xture with the baby pin and other accessories with the baby receiver.

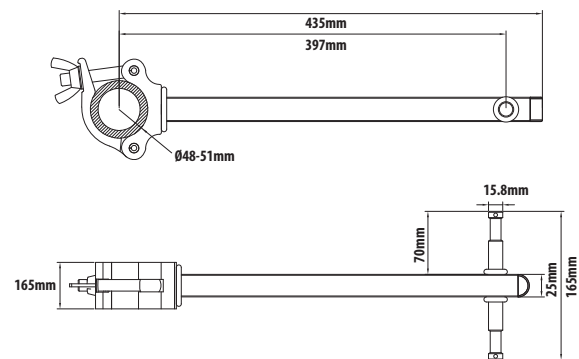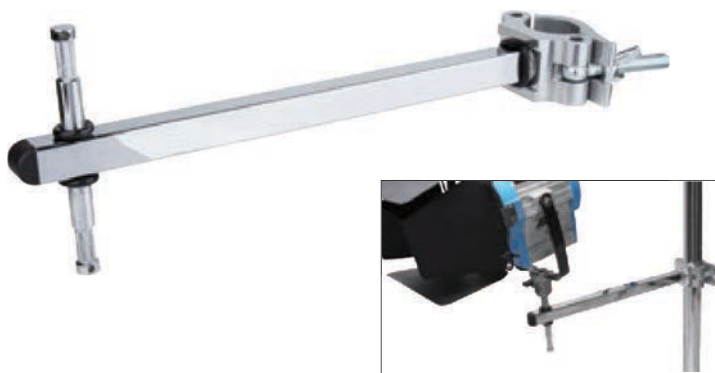

KCP-808 Baby Side Arm

20kg

Baby side arm with heavy duty coupler fits on tubes with diameters 2"(51mm) with a total length 380mm and double baby pins. This enables you to position a light head or grip head at a lower position or mount an additional light without the need for another stand.

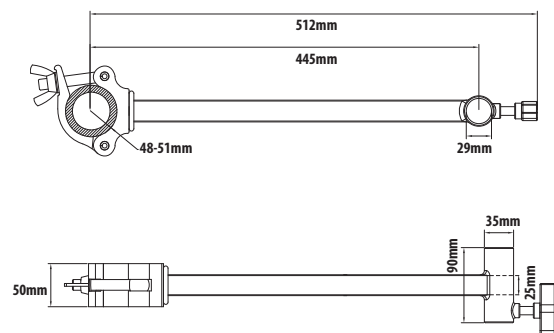

KCP-809 Junior Side Arm

40kg

A heavy duty coupler with 380mm side arm and junior receiver, which allows offsetting or adding a large light fixture on a stand either over or under (a safety linchpin is attached).



The strut channel is widely used in electrical support system and construction. It is made from thickness 2mm roll steel and folded with inward-curving shape to strengthen the stiffness for providing the greatest support and connecting other components. Formed in box size 1-5/8" (41mm) by 1-5/8" (41mm) and oval-slotted in 10 x 32mm. Available with surface treatment of galvanized or hotdipped galvanized.





KT-S300SG Strut Channel


3M Strut Channel, 41(W) x 41(H) x 2(T)mm, Oval-slotted, Galvani

KT-S300SH Strut Channel

3M Strut Channel, 41(W) x 41(H) x 2(T)mm, Oval-slotted, Hot-Dipped Galvanized.

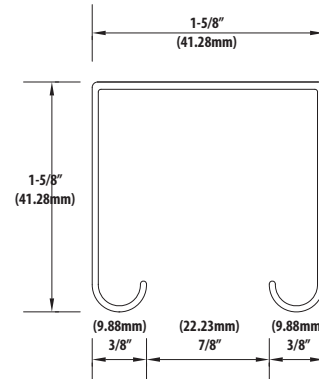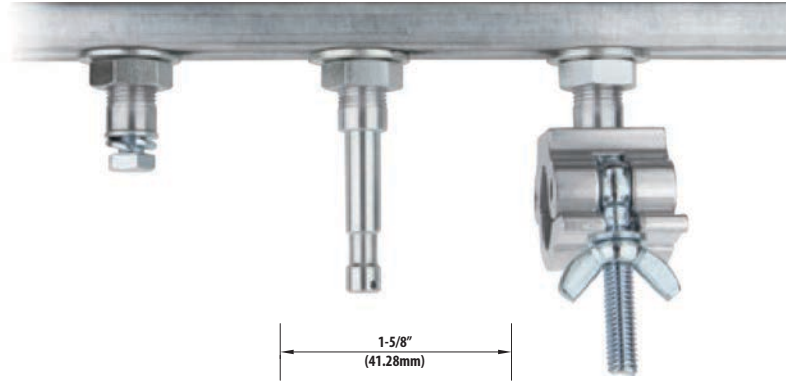

Strut channel adapters are used for hanging fixture or pipe to strut channel. Each strut channel adapter is welded with grooved top piece that can easily access to the track and hold the channel tightly. With strut channel adapter you will find it easy and fast to position the lighting fixture on the strut channel than ever. Suitable for standard 1-5/8" (width) strut channels. Strong and durable. WLL rated 220kgs.

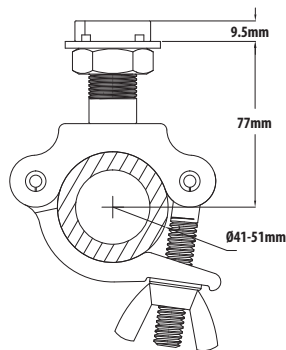

KT-057


Strut Channel Adapter w/ half coupler for 2" (50mm) tube
For adapting strut channel to pipe or tube.



0.7kg



220kg

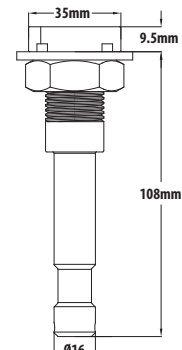

KT-058


Strut Channel Adapter w/ 5/8" (16mm) baby pin
For hanging film / video fixture or equipment.



0.3kg



200kg



KT-056

Strut Channel Adapter w/ 1/2"-13 bolt & nut
For hanging lighting fixture or equipment.



0.2kg



220kg

How to fasten the strut channel adapter:


1. Insert the adapter into the strut channel.
2. Rotate 90 degree.
3. Fasten the large hex nut to lock up with the channel.



A neat solution for attaching 3-phase (3 circuits) or DALI lighting track on Ø2"(48-51mm) pipe, tube or truss. This patented clamp is constructed of classic burger coupler with aluminum alloy, making it sturdy yet compact and lightweight. Quick set-up and flexible with adjustment. Feasible for 3-phase lighting track including ERCO, EUTRAC, ZUMBETOL and GLOBAL TRAC.



YOUTUBE
UNIVERSAL
LIGHT TRACK COUPLER

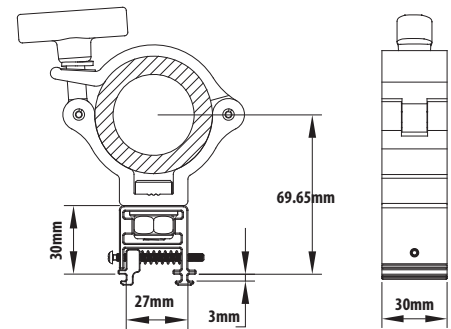


KCP-907 Universal Light Track Coupler

W 0.19kg Working Load Limit 20kg


Working with well-known track brands as followings:



YOUTUBE
KUPO MONITOR ARM WITH BURGER
COUPLER (KCP-879)



100 x 100 mm
panel is included

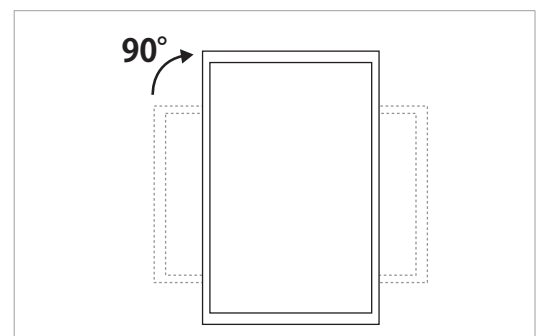

Easy and instantaneous rotation from landscape to portrait.



KCP-879 Monitor Arm w/ Burger Coupler

W 0.8kg Working Load Limit 8kg

Features a burger coupler equipped on the monitor arm allows to mount LCD monitor on Ø2"(48-51mm) truss effortless. Two ratcheting handle designed for easy slight pan and title movement. Standard VESA mounting point 75 x 75mm are drilled on the square black metal panel and adapter to 100 x 100mm is also included. Max loading weight: 8 kg (17.6 lbs)

VESA screen truss mount is designed for a mounting monitor or television to a 30-40cm truss. With standard VESA spacing both 75mm and 100mm, this bracket provides a much space-saving and effortless solution for mounting VESA monitor or television to the truss. Made of 5mm thickness rolled steel, the bracket is extremely strong and robust for mounting the equipment. It comes with two slim half couplers for rigging the tube diameter 2" (50.80mm).

Features

1. Compact and low profile
2. Made of 5mm robust steel
3. For VESA Spacing 75mm and 100mm
4. Suitable for common 30-40cm truss system
5. With two slim half couplers for attaching tube diameter 2"(50.8mm)




YOUTUBE
KUPO VESA SCREEN
TRUSS MOUNT (KCP-886)



Horizontal truss mount



Vertical truss mount

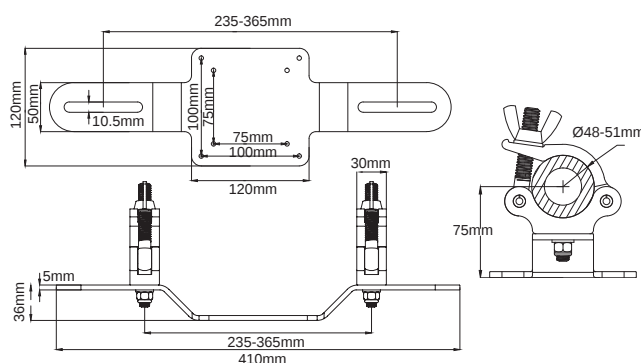


KCP-886 Vesa Screen Truss Mount

25kg



YOUTUBE
KUPO VESA MOUNTING
ADAPTER 100/200 (KS-512)



KS-512 Vesa Mounting Adapter 100 / 200

Fabricated of solid aluminum, this adapter easily helps you to expand standard VESA 75/100 mounting hole to larger spacing 100/200, for attaching flat TV with such mounting spacing accordingly. Slim, lightweight and quick installation.

Features

1. Expand VESA 75 x 75 and 100 x 100 to 200 x 100, and 200 x 200mm.
2. Made of aluminum alloy; set for 4 pieces.
3. Come with M8 Allen key bolts and M4 screws.
4. Suitable for KCP-886 and KCP-879.



YOUTUBE
KUPO VESA MOUNTING
ADAPTER 300/400 (KS-534)

KS-534 Vesa Mounting Adapter 300/400

This VESA adapter helps you to expand standard VESA 75/100 mounting hole to larger spacing including 200, 300 and 400mm, making an easy way for large flat TV to attach. Made of robust steel bar with black finish. Streamline, compact, and quick installation.



Features

1. Expand VESA 75 x 75 and 100 x 100 to 200 x 300, 200 x 400, 300 x 300, 300 x 400, and 400 x 400mm
2. Made of solid steel bar; set for 4 pieces
3. Come with M8 Allen key bolts and M4 screws
4. Suitable for KCP-886 (VESA screen truss mount)

This provides the most versatile installation for a flat panel television. This TV truss mount is designed for accommodating large TV screens from 37" to 52", for rigging on 30/40cm truss system. It features 15 degree forward and backward viewing angle adjustments as well as side-to-side positioning after installation. Gliding the brackets on the wall plate groove and buckling up with the safety hook secure the installation firmly. Slim and low profile for tidy appearance. The frame is made of heavy-duty metal with a durable power-coated finish.

Specification


Suitable for 37" to 52" flat TV screens. / Load Capacity: 80kgs
Tilt Adjustment: 0-30 degree (forward + backward)



Horizontal truss mount



Vertical truss mount

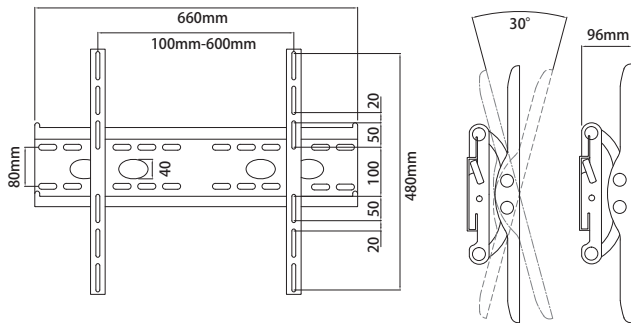

KCP-887 Universal TV Tilt Truss Mount


The combination of universal TV tilt truss mount and the aluminum tubes & pipe fittings, this unique mounting hardware enables the user to put a flat TV screen together with a lighting stand without too much effort. Sliding pipe fitting is supplied with two knobs for making offset adjustment easily. The 28mm junior spigot is good for large lighting stands. Suitable for 37" to 52" flat TV screen.

Specification

- 1. Load Capacity: 30kg
- 2. Weight: 9.5kg
- 3. Suitable for 37" to 52" flat TV screen
- 4. Tilt Adjustment: 0-30 degree (forward + backward)



Universal TV Tilt Stand Mount sets a flat TV screen on 483T wind-up stand.



KCP-888 Universal TV Tilt Stand Mount



KS-580 iMac Stand Mount Adapter W 0.41kg

This precision-machined aluminum adapter is specially designed for easy mounting of your iMac desktop computer (Compatible with 21" and 27" iMac models) on the light stand top which comes with a 5/8" (16mm) baby stud. The triangle plates are made with 4mm thick high-grade aluminum which can be securely attached to the iMac's cable pass-through hole with M6 bolts x 3 pcs (included). A 1/4"-20 female threaded and 3/8"-16 female threaded are drilled on the top 5/8" (16mm) baby receiver adapter for attaching any lighting, video or photo accessories. Comes with 1/4"-20 or 3/8"-16 male threaded. A simple yet reliable solution to mount your iMac.



KS-590 iMac Truss Mount Clamp W 0.61kg

Features a coupler for a 2" tube connected with the triangle plates which allows secure mounting of your iMac desktop computer (Compatible with 21" and 27" iMac models) on the truss system or any tube that comes with O.D. 50mm. The brushed aluminum finish melded with the look of an iMac, giving an attractive and functional set up.

Features


1. Constructed from solid aluminum keeps your iMac safe and secure on light stand.
2. No need to remove the stand or modify the iMac to mount on the light stand top.
3. Mount Kit for Apple 21.5" and 27" iMac Display.

Literally user-friendly and like no others. This versatile and one-of-a-kind projector mount is fabricated with ball joint, providing totally 360 degree movement for fine positioning, and saving you much working time. Ratchet handle gives a positive and firm lock to fasten. The base is slotted with vortex pattern for maximum flexibility of accommodating diverse brands of projectors. KD-300 bi-functional top can be used as dia. 16mm socket (hole) or dia. 28mm spigot for fitting various clamps. KD-300-J fabricated with 17mm stud for fitting with specific junior receiver.




YOUTUBE
UNIVERSAL
PROJECTOR MOUNT

Application

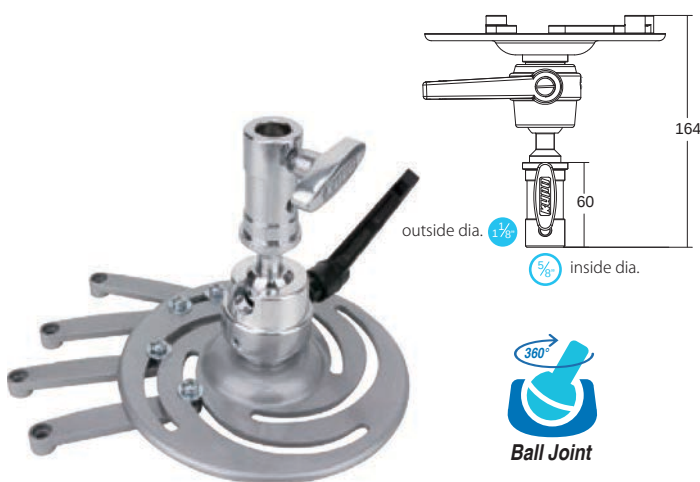

KD-300 W 1.05kg 15kg Universal Projector Mount w/ 16mm Receiver

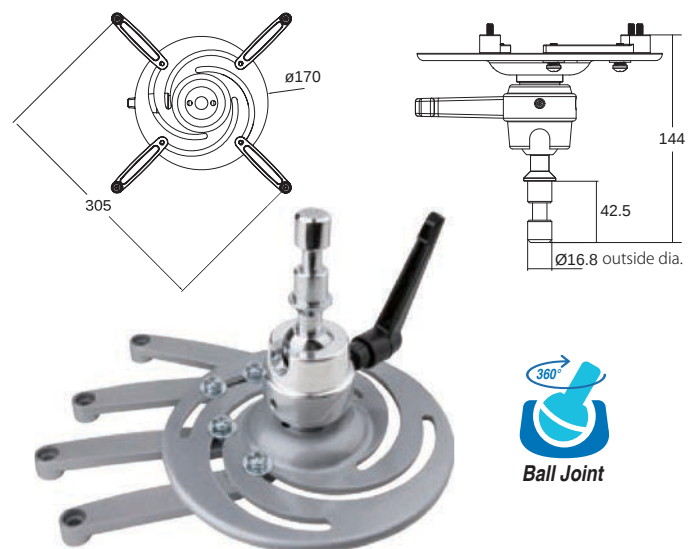


KD-300-J W 1.0kg 15kg Universal Projector Mount w/ 17mm stud

A series of couplers that fit the tube outside diameter smaller than typical 2" tube, ranging from 20mm to 40mm. Made of 6061-T6 high tensile extruded aluminum alloy with compact profile and diverse models. Ideal for lightweight fixture for shop, display and museum. Available in black and polish finish.



Mini Half Coupler

Item	Type	Feasible tube size	Attachment	Load Capacity
KCP-0201	Mini Coupler 20	20-22mm	M6 x 25mm bolt + wing nut	100kg
KCP-0201B	Mini Coupler 20, Black	20-22mm	M6 x 25mm bolt + wing nut	100kg
KCP-811	Mini Coupler 25	23-25.4mm	1/4"-20 x 3/4" bolt + nylon lock nut	100kg
KCP-811B	Mini Coupler 25, Black	23-25.4mm	1/4"-20 x 3/4" bolt + nylon lock nut	100kg
KCP-0301	Mini Coupler 30	25-28mm	M6 x 25mm bolt + wing nut	100kg
KCP-0301B	Mini Coupler 30, Black	25-28mm	M6 x 25mm bolt + wing nut	100kg
KCP-0351	Mini Coupler 35	30-35mm	M8 x 35mm bolt + wing nut	100kg
KCP-0351B	Mini Coupler 35, Black	30-35mm	M8 x 35mm bolt + wing nut	100kg
KCP-0401	Mini Coupler 40	35-40mm	M10 x 30mm bolt + wing nut	100kg
KCP-0401B	Mini Coupler 40, Black	35-40mm	M10 x 30mm bolt + wing nut	100kg

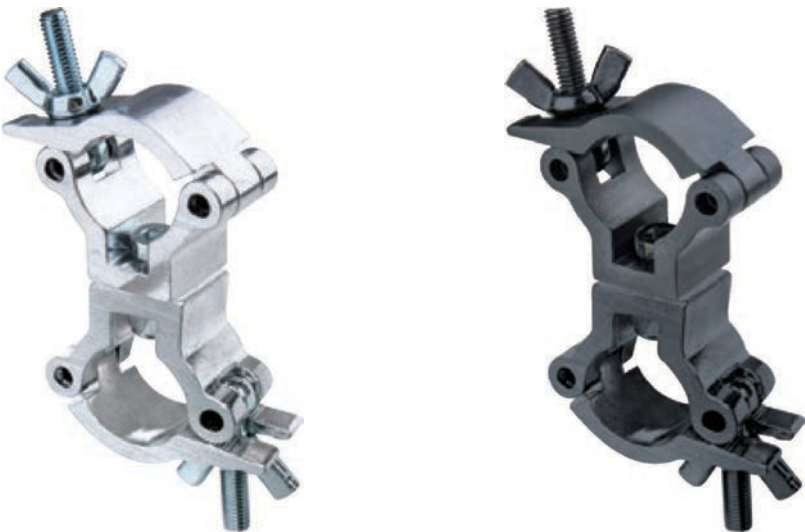



Mini Swivel Coupler

Item	Type	Feasible tube size	Load Capacity	Color
KCP-0202	Mini Swivel Coupler 20	20-22mm	100kg	Silver
KCP-0202B	Mini Swivel Coupler 20, Black	20-22mm	100kg	Black
KCP-815	Mini Swivel Coupler 25	23-25.4mm	100kg	Silver
KCP-815B	Mini Swivel Coupler 25, Black	23-25.4mm	100kg	Black
KCP-0302	Mini Swivel Coupler 30	25-28mm	100kg	Silver
KCP-0302B	Mini Swivel Coupler 30, Black	25-28mm	100kg	Black
KCP-0352	Mini Swivel Coupler 35	30-35mm	100kg	Silver
KCP-0352B	Mini Swivel Coupler 35, Black	30-35mm	100kg	Black
KCP-0402	Mini Swivel Coupler 40	35-40mm	100kg	Silver
KCP-0402B	Mini Swivel Coupler 40, Black	35-40mm	100kg	Black




Mini Eye Ring Coupler

Item	Type	Feasible tube size	Attachment	Load Capacity	Color
KCP-0203	Mini Eye Ring Coupler 20	20-22mm	M6 Eye Ring	90kg	Silver
KCP-0203B	Mini Eye Ring Coupler 20, Black	20-22mm	M6 Eye Ring	90kg	Black
KCP-812	Mini Eye Ring Coupler 25	23-25.4mm	M6 Eye Ring	90kg	Silver
KCP-812B	Mini Eye Ring Coupler 25, Black	23-25.4mm	M6 Eye Ring	90kg	Black
KCP-0303	Mini Eye Ring Coupler 30	25-28mm	M6 Eye Ring	90kg	Silver
KCP-0303B	Mini Eye Ring Coupler 30, Black	25-28mm	M6 Eye Ring	90kg	Black
KCP-0353	Mini Eye Ring Coupler 35	30-35mm	M8 Eye Ring	90kg	Silver
KCP-0353B	Mini Eye Ring Coupler 35, Black	30-35mm	M8 Eye Ring	90kg	Black
KCP-0403	Mini Eye Ring Coupler 40	35-40mm	M10 Eye Ring	90kg	Silver
KCP-0403B	Mini Eye Ring Coupler 40, Black	35-40mm	M10 Eye Ring	90kg	Black

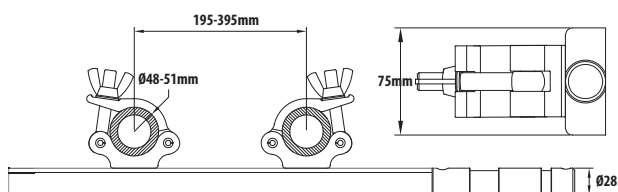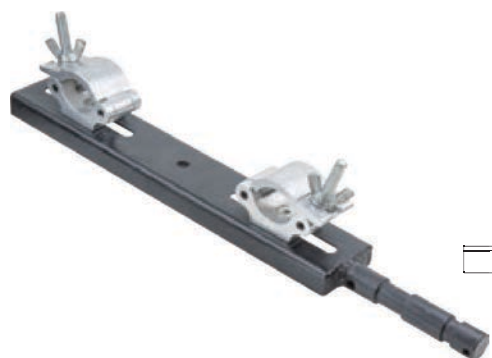


KCP-835V Ladder Truss Coupler

W 3.10kg ↓ 200kg

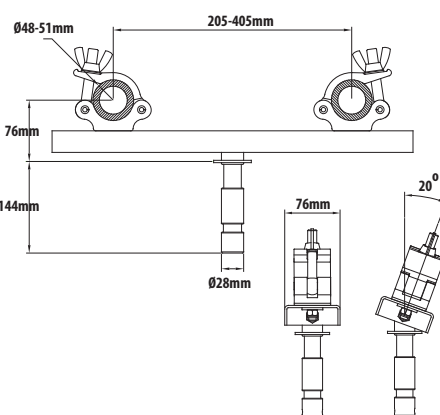


KCP-835 Truss Coupler

W 3.10kg ↓ 200kg

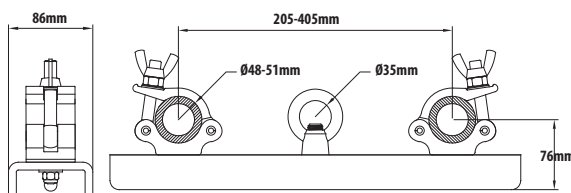

KCP-835L Lifting Truss Coupler

W 5.0kg ↓ 500kg M16

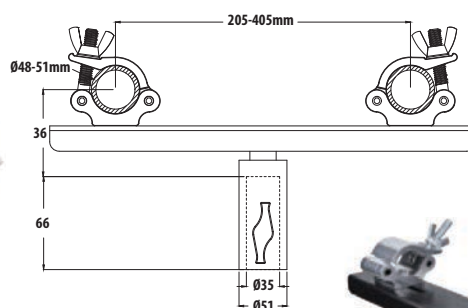

KCP-835F Truss Adapter for Speaker Stand

W 3.9kg ↓ 200kg

Easily transforming a simple speaker stand to a truss lifter. Equipped with 35mm receiver, this adapter fits most of speaker stands in the market and suits the truss tube span 205-405mm. Chrome-plated center piece with hand-tightening knob.

The Kupo telescopic hanger family features a quick release clamp allowing the user to quickly and securely suspend a lighting fixture or other equipment overhead for an unobstructed floor area. Constructed by quality steel with a superior chrome plated surface treatment for lasting durability. A stirrup head is on the end of the telescopic hanger designed for those lighting fixtures with clamps mounted on the head directly. A universal adapter is also available on the hanger for those lighting fixtures with a junior pin securely mounted on telescopic hangers. Safety pins for both versions are equipped to prevent the riser from slipping. A full range of telescopic hangers are supplied from lengths 3 to 10 feet (91.4 cm ~ 304.8 cm) to meet all industrial requirements.



Stirrup Head: Dia. 40mm Baby pin: 5/8" (16mm)



KS-215 & KS-215B Stirrup Head
Made of 5mm thick gauge aluminum alloy and welded with dia. 50mm tube, this stirrup head is designed for mounting lighting fixture with clamp or coupler. Dia. 12.5mm hole on the bracket for attaching telescopic hanger or drop pole. Available in black and silver paints. Load capacity 100kg



**YOUTUBE
TELESCOPIC HANGERS**

PATENTED

Quick Release Clamp allows user to Quickly and Securely Suspend a Lighting Fixture Overhead for an Unobstructed Floor Area.



Stirrup head



**YOUTUBE
KUPO TELESCOPIC
HANGER
W/ STIRRUP HEAD**



Universal head



**YOUTUBE
KUPO TELESCOPIC
HANGER W/
UNIVERSAL HEAD**

KTHS-0306 Short Telescopic Hanger w/ Stirrup Head

L	91.4cm 3 feet	H	182.8cm 6 feet	W	5.3kg 11.7lbs	max	40kg 88lbs
----------	------------------	----------	-------------------	----------	------------------	------------	---------------

KTHS-0408 Medium Telescopic Hanger w/ Stirrup Head

L	121.9cm 4 feet	H	246.8cm 8 feet	W	6kg 13.2lbs	max	40kg 88lbs
----------	-------------------	----------	-------------------	----------	----------------	------------	---------------

KTHS-0510 Long Telescopic Hanger w/ Stirrup Head

L	152.4cm 5 feet	H	304.8cm 10 feet	W	6.7kg 14.8lbs	max	40kg 88lbs
----------	-------------------	----------	--------------------	----------	------------------	------------	---------------

KTHU-0306 Short Telescopic Hanger w/ Universal Head

L	91.4cm 3 feet	H	182.8cm 6 feet	W	5.3kg 11.7lbs	T	V
----------	------------------	----------	-------------------	----------	------------------	----------	---

- Baby pin (16 mm spigot) max load: 10 kg / Junior receiver (28 mm socket) max load: 40 kg
- Linch Pin is attached with safety wire.

KTHU-0408 Medium Telescopic Hanger w/ Universal Head

L	121.9cm 4 feet	H	246.8cm 8 feet	W	6kg 13.2lbs	T	V
----------	-------------------	----------	-------------------	----------	----------------	----------	---

- Baby pin (16 mm spigot) max load: 10 kg / Junior receiver (28 mm socket) max load: 40 kg
- Linch Pin is attached with safety wire.

KTHU-0510 Long Telescopic Hanger w/ Universal Head

L	152.4cm 5 feet	H	304.8cm 10 feet	W	6.7kg 14.8lbs	T	V
----------	-------------------	----------	--------------------	----------	------------------	----------	---

- Baby pin (16 mm spigot) max load: 10 kg / Junior receiver (28 mm socket) max load: 40 kg
- Linch Pin is attached with safety wire.


KTHU-0712 Extra Long Telescopic Hanger w/ Universal Head

L	233.4cm 7 feet	H	400cm 12 feet	W	7.0kg 15.4lbs	T	V
----------	-------------------	----------	------------------	----------	------------------	----------	---

- Baby pin (16 mm spigot) max load: 10 kg / Junior receiver (28 mm socket) max load: 40 kg
- Linch Pin is attached with safety wire.



Quick action clamp for rigging on tube size from 25~55 mm.



Push to lock



Press to release



Safety pin

Kupo Lightweight telescopic hangers are made of solid steel with matt black powder coated finish, designed for mounting with lightweight fluorescents, LED lights or any lighting fixtures less than 15kg (33lbs) weight. Features a safety wire equipped on the column to avoid the iron casting clamp unexpectedly dropping off and the quick release ball safety pin is also equipped to prevent the riser from slipping. The iron casting clamp used for pipe from 1-1/2" (35mm) to 2-1/2" (65mm) O.D. and the collar on the top of telescopic hanger keeps it safe for pan adjustment while the knob of the clamp is loosened. The stirrup head on the end of the telescopic hanger for those lighting fixtures comes with clamps that can be mounted on the hanger directly. Any lighting fixtures equipped with 5/8" (16mm) baby receiver can be mounted on the baby pin on the end of the telescopic hanger.



Stirrup Head: Dia. 40mm



Baby pin: 5/8" (16mm)

KLHS-0103 Short Lightweight Telescopic Hanger w/ Stirrup Head

L 53.3cm 1.5 feet	H 91.4cm 3 feet	W 3kg 7.62lbs	max 15kg 33lbs
-----------------------------	---------------------------	-------------------------	--------------------------

KLHS-0204 Medium Lightweight Telescopic Hanger w/ Stirrup Head

L 68.8cm 2 feet	H 121.9cm 4 feet	W 3.6kg 7.92lbs	max 15kg 33lbs
---------------------------	----------------------------	---------------------------	--------------------------

KLHS-0306 Long Lightweight Telescopic Hanger w/ Stirrup Head

L 91.4cm 3 feet	H 182.8cm 6 feet	W 4kg 8.8lbs	max 15kg 33lbs
---------------------------	----------------------------	------------------------	--------------------------

KLHB-0103 Short Lightweight Telescopic Hanger w/ Baby Pin

L 53.3cm 1.5 feet	H 91.4cm 3 feet	W 2.5kg 5.5lbs	max 15kg 33lbs
-----------------------------	---------------------------	--------------------------	--------------------------

KLHB-0204 Medium Lightweight Telescopic Hanger w/ Baby Pin

L 68.8cm 2 feet	H 121.9cm 4 feet	W 2.8kg 6.16lbs	max 15kg 33lbs
---------------------------	----------------------------	---------------------------	--------------------------

KLHB-0306 Long Lightweight Telescopic Hanger w/ Baby Pin

L 91.4cm 3 feet	H 182.8cm 6 feet	W 3.2kg 7.04lbs	max 15kg 33lbs
---------------------------	----------------------------	---------------------------	--------------------------



KS-215 & KS-215B Stirrup Head

Made of 5mm thick gauge aluminum alloy and welded with dia. 50mm tube, this stirrup head is designed for mounting lighting fixture with clamp or coupler. Dia. 12.5mm hole on the bracket for attaching telescopic hanger or drop pole. Available in black and silver paints. Load capacity 100kg



Quick release ball safety pin prevents the riser from slipping.



Safety wire quipped on the column to avoid clamp unexpected drop-off.



1/4"-20 female thread on the top of 5/8" (16mm) baby pin.



The collar on the top of the telescopic hanger keeps it safe for pan adjustment while the knob of the clamp is loosened.



YOUTUBE
TELESCOPIC HANGERS

PATENTED

Quick release clamp allows quick and secure suspension of a lighting fixture overhead for an unobstructed floor area.



Push to lock



Press to release



KCP-817

Quick Action Pipe Clamp W 1.1kg Working Load Limit 50kg

Kupo Quick Action Pipe Clamp is designed for rigging on a pipe with diameters from 25mm (0.9") – 55mm (2.1"). Features an unique quick action locking device which allows you to tighten or loosen the knob in just a snap. The telescopic column is available for hanging a lighting fixture by attaching any pipe with max dia. 35mm in horizontal or vertical direction. The 28mm (1-1/8") stud can be also used for directly hanging a lighting fixture or any gear with a 28mm (1-1/8") stud.



KCP-818 Adjustable Baby Side Arm W 2.1kg

Designed for offsetting lighting fixtures or accessories with twin baby (16mm) pins from a stand. Features an adjustable quick release coupler which mounts on tube sizes from 25-50 mm and can be positioned anywhere along the 15" (380mm) length quickly and easily.



KCP-819 Adjustable Junior Side Arm W 2.1kg

Designed for offsetting a boom arm or large lighting fixture from a heavy duty stand. Features an adjustable quick release coupler which mounts on any tube size from 25-50 mm and can be positioned anywhere along the 16.1" (410 mm) length quickly and easily.



C-02 is industrial standard hook clamp made of 6 mm x 25 mm rolled steel with protective tab for positive rigging to 48-51mm barrel or truss without damaging the tube. Standard finish is Galvanized or black powder coating.



C-02N / C-02NB Clamp W 0.39kg Working Load Limit 40kg
Wing Bolt / M12 Bolt & Nylon nut: yes







C-02TN / C-02TBN Clamp W 0.41kg Working Load Limit 40kg
T-Handle / M12 Bolt & Nylon nut: yes



C-02N-P / C-02BN-P Clamp W 0.39kg Working Load Limit 40kg
Wing Bolt / M12 Bolt & Nylon nut: yes / Protective tab: yes




C-02TN-P / C-02TBN-P Clamp W 0.41kg Working Load Limit 40kg
T-Handle / M12 Bolt & Nylon nut: yes / Protective tab: yes

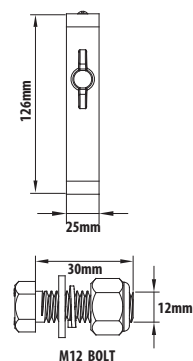

C-10W Tiny Clamp


W 0.17kg Working Load Limit Lever sunk: 14&17 mm

C-10 tiny clamp is made for tube Ø 12-36 mm and square plate thickness 10-45 mm. The double level countersunk accepts M10 and 3/8 bolts. It can accommodate optional 16 mm socket (KS-062), and turn to be a tiny fixing point for photographic lighting fixtures.




C-03 Steel Hook Clamp W 0.43kg ↓ 40kg 3/8"-16

C-03 is heavy duty G clamp of 6mm x 32mm rolled steel. T handle pipe bolt offers an easy grip on standard 2" (51 mm) tube or square pipe. The clamp is supplied with welded yoke bolt and wing nut. Standard finish in black.




C-03S W 0.43kg ↓ 40kg 3/8"-16 Steel Hook Clamp for 1.5" Tube

C-03S is the miniature size of standard C-03 clamp to fit tube 1.5".

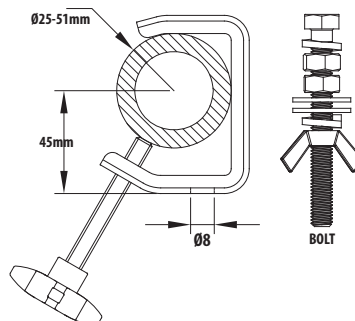


C-04 Steel Hook Clamp W 0.19kg ↓ 10kg M8 x 75mm

C-04 steel G clamp is suitable for securing Pin spot or D.J. effect lighting on dia. 25-51mm tube. Standard finish in black.




C-08 / C-08B W 0.38kg ↓ 275kg 1/2"-13 Aluminum Extrusion Clamp

The C-08 clamp is made from high tensile extruded aluminum. It is light weight and strong hanging hardware for conventional fixture. The interior teeth of clamp are designed to grip the tube from 1-1/4" to 2" tube. With 1/2"-13 yoke bolt and washer. Black anodized finish.



C-09 / C-09B W 0.09kg ↓ 55kg 5/16"-18 Mini Aluminum Extrusion Clamp


C-09 clamp is same profile as C-08 but with miniature size. It is ideal for hanging fixture like Par16 birdie or LED fixture on to a tube from 1" to 1-1/4" tube. with 5/16"-18 yoke bolt and washer.



C-05 / C-05B Aluminum Alloy Hook Clamp

W 0.45kg ↓ 40kg Bolt 3/8"-16

Light weight aluminum die casting hook clamp comes with a dia.17mm spigot (Dabo) with 3/8"-16 bolt for fixture yoke. Intend for rigging Par can and lightweight fixtures. A wing bolt allows no tool loosen to do pan adjustment quick and safely. The pipe bolt is built with truss protector to avoid possible truss damage. It is designed for finger tight only and overhanging is not suggested.




C-05QB Quick Release Aluminum Alloy Hook Clamp

W 0.48kg ↓ 40kg Bolt 3/8"-16


same as C-05 hook clamp but with a spring release collar to lock spigot automatically and push to release quickly.

Same features with C-05 clamp but made with iron casting material for heavier duty and durability. Fit tube diameter 30-51mm. Standard finish in black. C-01QP comes with quick locking latch for holding the spigot (DABO) automatically and releasing without too much effort.




C-01B Steel Iron Casting Clamp

W 0.64kg ↓ 40kg Bolt 3/8"-16




C-01QB Quick Release Steel Iron Casting Clamp

W 0.64kg ↓ 40kg Bolt 3/8"-16

**KS-013**

W 80g

Ø17mm spigot (DABO) with washer & lock nut for C-05 & C-01 family.

**KS-013FS**

W 65g

Ø17mm spigot (DABO), female threaded.

**KS-013F**

W 75g

Ø17mm spigot (DABO), female threaded with 3/8"-16 bolt & washer.

**KS-113**

W 80g

Ø17mm spigot, female threaded with 3/8" to 1/4" stainless steel adapter (26mm width).

**KS-123**

3/8" to 1/4" double male threaded adapter, stainless steel with 26mm width.

**KS-202B**

Double End TVMP Spigot w/ 17mm Receiver


This is the most versatile adapter ever. External diameter (28mm spigot) fits a junior receiver, while internal diameters (16mm and 17mm at each end) suits baby pin. Additional threaded hole for relocating the set screws while they are not used. Made of lightweight yet sturdy aluminum alloy with black anodized finish. Legend is clearly laser engraved for identification.

**KS-CB09**

Mini Ball Head w/ 17MM Spigot (DABO)

It features a mini ball head terminated with a 17mm spigot (DABO) which designed primarily for 17mm receiver (Japanese type).


The classic C clamp or pipe clamp is designed for most hanging applications. Intend for use from 1-1/2" to 2" O.D. iron pipe in theater. 2-1/2" long steel shaft with 1/2"-13 yoke bolt and wash. A square head pan set screw allows you to rotate the fixture. Comes in black powder

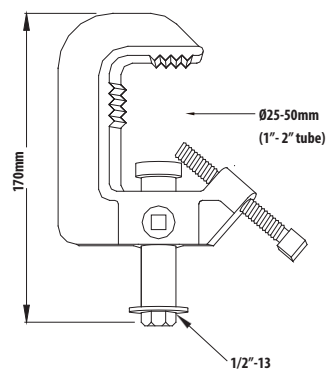

C-06 Heavy Duty Iron Casting Clamp

W 0.87kg ↓ 100kg


NOTE: When using c-clamps care must be taken. Do not over-tight the pipe bolt which affixes the clamp to the batten. If this bolt is over-tighten, it can easily dimple or "drill" into the batten seriously compromising the strength of the batten. A finger tight plus half turn with the wrench is all that is required.

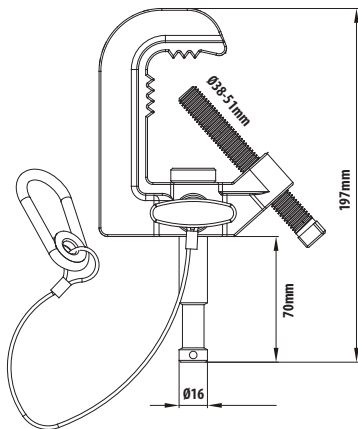

C-16 Baby Pipe Clamp

W 0.95kg ↓ 100kg


It is identical old C clamp but terminated with 16mm baby stud. The collar on the top of baby pin keeps it safe for pan adjustment of luminaires while the knob of clamp is loosened. The safety wire is also built with the clamp to ensure this essential safety aid is always on hand.

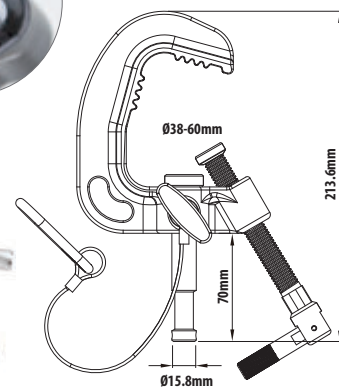

C-26 Titan Clamp

w/ 16mm Baby Pin For Tube 60mm W 1.2kg ↓ 100kg


Equipped with a 16mm baby spigot for most of TV/Studio luminaires, this clamp fits the tube with diameter up to 60mm. Short-handle tommy bar prevents the handle got stuck with luminaire while in operation. Made of iron casting. Sturdy and durable. Safety cable is supplied as standard part.

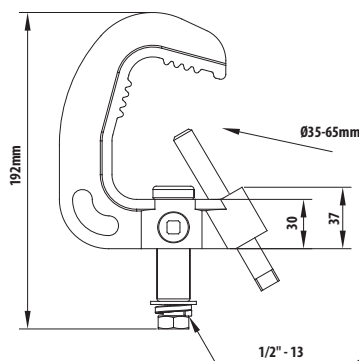

C-06T Titan Iron Casting Clamp

W 1.25kg ↓ 100kg

Designed for luminaires to fasten to the tube or pipe of outside diameter 1-1/2" to 2-1/2" (35mm-65mm). This iron casting clamp is durable to hold the payload up to 220lbs (100kgs). Coming with 3-1/2" steel long shaft and 1/2"-13 bolt & washer. Main body has a bonding position for safety wire to anchor.

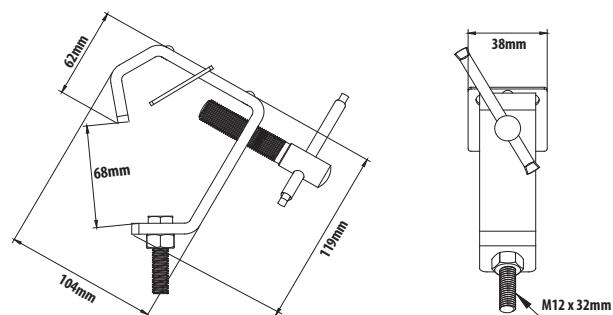

W 0.90g **↓** 40kg **⌚** M12 x 32mm

W 0.40g **↓** 40kg **🔧** M12 x 38mm



C-07BB


C-07B

C-07BB



C-07C


C-07CB

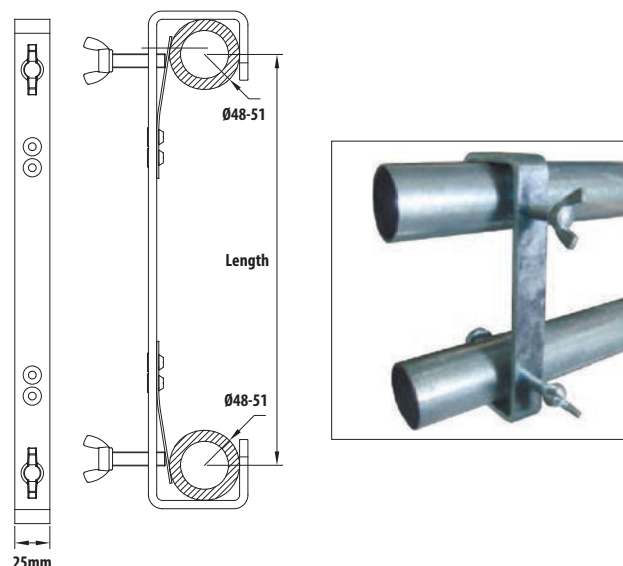

Length: 132mm / Weight: 0.52kg / Safe working load: 40kg

Length: 297mm / Weight: 0.69kg / Safe working load: 40kg


Length: 597mm / Weight: 1.05kg / Safe working load: 40kg



KCP-702

Stage Clamp w/ 14mm Hole


W 0.39kg Working Load Limit 50kg



KCP-703

Stage Clamp w/ 16mm Stud


W 0.52kg Working Load Limit 50kg



KCP-704

Stage Clamp w/ 28mm Stud

W 1.03kg Working Load Limit 50kg



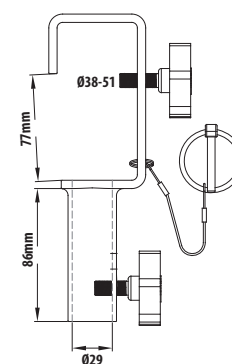


KCP-705

Stage Clamp w/ 28mm Socket

W 0.75kg Working Load Limit 150kg

Fabricated with rugged steel, tent clamp is designed for rigging the equipment with ease to a tent or canopy structure. Adjustable to fit a wide range of span from 50 to 110mm. With 1 x M14, 2 x M12, 2 x M10 threaded fixing hole on the bottom plate for greater utility. Max. WLL 150kg on central M14 fixing hole. Finish available with silver painting or black painting. TUV certified.

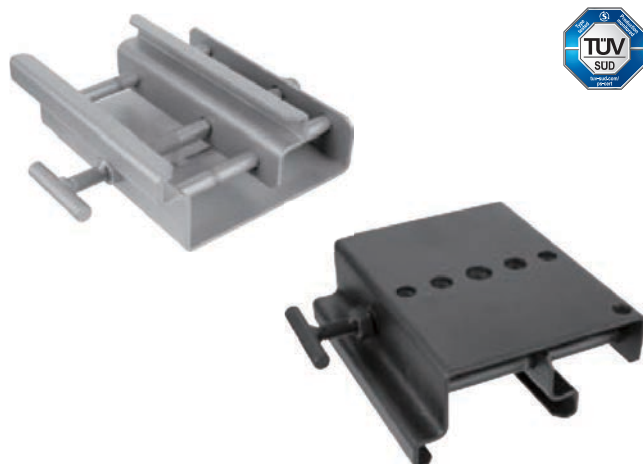

C-14SP / C-14BP Tent Clamp

W 1.3kg Working Load Limit 150kg / for central M14 fixing hole

Made of malleable iron casting with hot dip galvanized finish, Kupo pipe clamps are enhanced with further surface zinc plating in addition to the initial finish, providing excellent performance against environmental corrosion. It is constructed for a wide variety of tubular applications and structures. Stainless hex screw helps to firmly lock the pipe into the clamp. Versatile and rigid. Suitable for outside diameter 48.30mm tubular pipe.

Subject to the iron cast manufacturing, dimension might slightly differ in each production. The dimension given are nominal value for reference only.




YOUTUBE
KUPO MALLEABLE
IRON CASTING PIPE CLAMPS
(FULL FOOTAGE)




YOUTUBE
KUPO MALLEABLE
IRON CASTING PIPE CLAMPS
(PRODUCT CODE)



- Made with the material in accordance with ASTM A197.
- Surface treatment in accordance with ASTM A153.
- Stainless steel hex screw.
- No welding required.
- Quick installation.
- Enhanced surface treatment for better corrosion protection.
- Suitable for pipe with outside diameter 48.30mm.
- Black finish or other color is available upon request.




KPC-101 Short Tee, Silver
KPC-101B Short Tee, Black




KPC-104 Long Tee, Silver
KPC-104B Long Tee, Black




KPC-116 Corner, Silver
KPC-116B Corner, Black




KPC-119 Two Socket Cross, Silver
KPC-119B Two Socket Cross, Black




KPC-125 90 Degree Elbow, Silver
KPC-125B 90 Degree Elbow, Black




KPC-128 3 Way 90 Degree, Silver
KPC-128B 3 Way 90 Degree, Black




KPC-129 Adjustable Short Tee, Silver
KPC-129B Adjustable Short Tee, Black




KPC-131 Base Flange, Silver
KPC-131B Base Flange, Black




KPC-132 Railing Base Flange, Silver
KPC-132B Railing Base Flange, Black




KPC-135 Clamp-on Tee, Silver
KPC-135B Clamp-on Tee, Black




KPC-138 Gate Eye, Silver
KPC-138B Gate Eye, Black

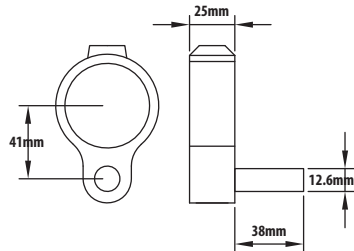


KPC-140 Gate Hinge, Silver
KPC-140B Gate Hinge, Black




KPC-143 Handrail Bracket, Silver
KPC-143B Handrail Bracket, Black

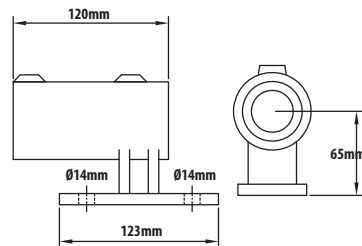


KPC-144 Railing Side, Silver
KPC-144B Railing Side, Black




KPC-146 Side Palm Fixing, Silver
KPC-146B Side Palm Fixing, Black




KPC-147 Internal Swivel Tee, Silver
KPC-147B Internal Swivel Tee, Black




KPC-148 Short Tee Swivel, Silver
KPC-148B Short Tee Swivel, Black




KPC-149 Sleeve Joint, Silver
KPC-149B Sleeve Joint, Black

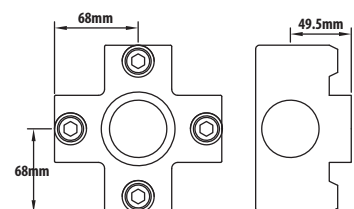


KPC-158 4 Way Cross, Silver
KPC-158B 4 Way Cross, Black




KPC-160 Clamp-on Crossover, Silver
KPC-160B Clamp-on Crossover, Black




KPC-161 90 Degree Crossover, Silver
KPC-161B 90 Degree Crossover, Black




KPC-165 Combination Socket Tee & Crossover, Silver
KPC-165B Combination Socket Tee & Crossover, Black




KPC-167 Double Swivel Combination, Silver
KPC-167B Double Swivel Combination, Black




KPC-168 90 Degree Corner Swivel, Silver
KPC-168B 90 Degree Corner Swivel, Black




KPC-169 Swivel Base, Silver
KPC-169B Swivel Base, Black




KPC-173 Single Swivel Combination, Silver
KPC-173B Single Swivel Combination, Black



KPC-176 Side Outlet Tee, Silver
KPC-176B Side Outlet Tee, Black




KPC-179 Locking Collar, Silver
KPC-179B Locking Collar, Black



KPC-198 Double Side Fixing Bracket, Silver
KPC-198B Double Side Fixing Bracket, Black

Made of A535 aluminum alloy, the aluminum slip-on clamps features high strength, corrosion resistance, and lightweight. Polished finish keeps the surface bright and attractive, and the aluminum-magnesium alloy makes the clamps extremely durable, tough, lighter than the iron clamp, and require little long-term maintenance. Flexible, versatile and rigid. Designed for well-known Schedule 40 pipe. Suitable for a wide variety of tubular applications and structures such as film industry, amusement park, playground, recreational venue, contemporary store and restaurant, industrial guardrails, display and much more.

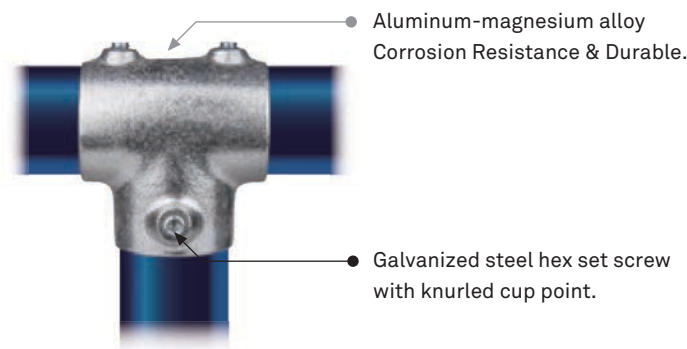


Feature

- Lightweight and corrosion resistance, ideal for outdoor or harsh environment.
- Quick and easy installation with a standard hex key, no special tools required
- No welding; no specialist labor required.
- Fitting with 3/8" galvanized steel recessed grub screw with reverse knurled cup point.
- Tapered-dome design for holding the set screws over their entire length.
- Suitable for Schedule 40 nominal pipe 1-1/4" and 1-1/2"

Subject to aluminum casting manufacturing, dimension might slightly differ in each production.
The dimensions given are nominal value for reference only


90 DEGREE



KPC-A1203 | For tube O.D. 48.30mm (1.90")
KPC-A1403 | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]
50.2	59	94	25
44	51	83	22


ADJUSTABLE ELBOW

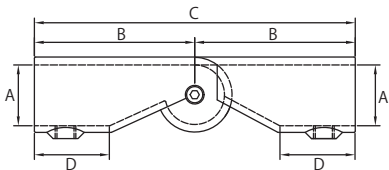

KPC-A1203AE | For tube O.D. 48.30mm (1.90")
KPC-A1403AE | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	Minimum corner
50.2	114	228	41	42 degree
44	97	194	41	


LONG TEE



KPC-A1205 | For tube O.D. 48.30mm (1.90")
KPC-A1405 | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	59	94	25	86
44	51	83	22	70



SHORT TEE



KPC-A1205E | For tube O.D. 48.30mm (1.90")
KPC-A1405E | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	57	87.5	25	64
44	51	78	22	57


TWO SOCKET CROSS



KPC-A1207E | For tube O.D. 48.30mm (1.90")
KPC-A1407E | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	30.5	61	25	113
44	26.5	53	22	102



3 WAY 90 DEGREE

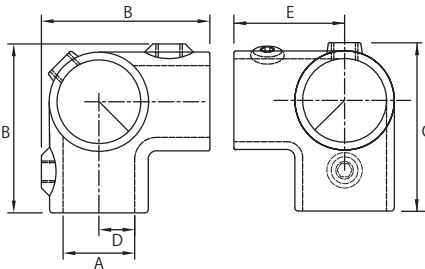

KPC-A1209 | For tube O.D. 48.30mm (1.90")
KPC-A1409 | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	94	94	25	59
44	83	83	22	52



CORNER

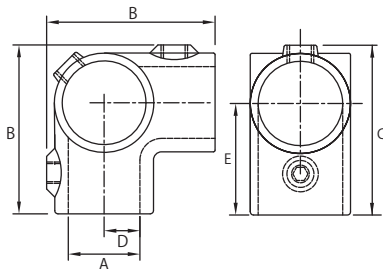

KPC-A1211E | For tube O.D. 48.30mm (1.90")
KPC-A1411E | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	94	94	25	59
44	83	83	22	52


90 DEGREE CROSSOVER



KPC-A1212 | For tube O.D. 48.30mm (1.90")
KPC-A1412 | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]
50.2	52	63.5
44	45	56.5


ADJUSTABLE ELBOW OR TEE



KPC-A1217E | For tube O.D. 48.30mm (1.90")
KPC-A1417E | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	38	57	28.5	44
44	38.5	52	29	42


MALE TAB OF SWIVEL

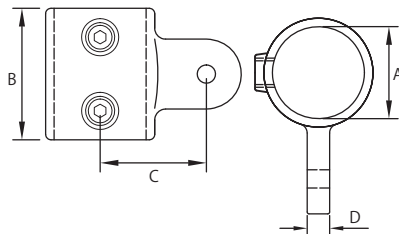

KPC-A1217M | For tube O.D. 48.30mm (1.90")
KPC-A1417M | For tube O.D. 42.40mm (1.66")


A [mm]	B [mm]	C [mm]	D [mm]
50.2	70	55	12
44	60	52	11

SWIVEL ELBOW / TEE

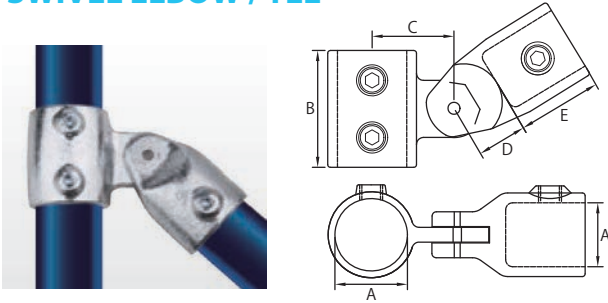**KPC-A1217ADJ** | For tube O.D. 48.30mm (1.90")**KPC-A1417ADJ** | For tube O.D. 42.40mm (1.66")


A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	70	57	28.5	44
44	60	52	29	42

DOUBLE SWIVEL COMBINATION

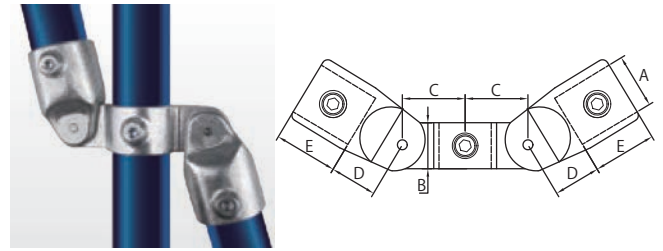**KPC-A1219E** | For tube O.D. 48.30mm (1.90")


A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	39	57	28.5	44

DOUBLE SWIVEL COMBINATION

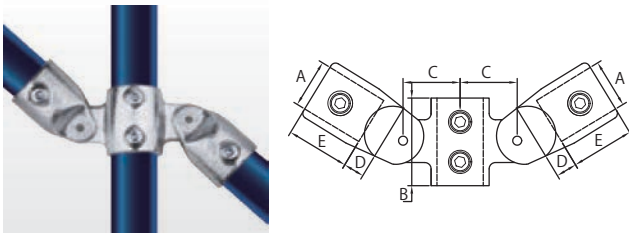**KPC-A1419E** | For tube O.D. 42.40mm (1.66")


A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
44	70	49	29	42

SHORT TEE SWIVEL

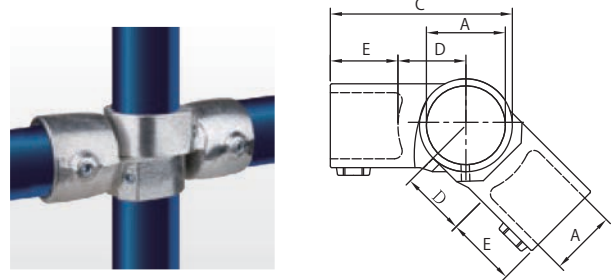**KPC-A1230C** | For tube O.D. 48.30mm (1.90")**KPC-A1430C** | For tube O.D. 42.40mm (1.66")


A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
50.2	62	111	38	42
44	54	100	35	36

ROUND BASE FLANGE

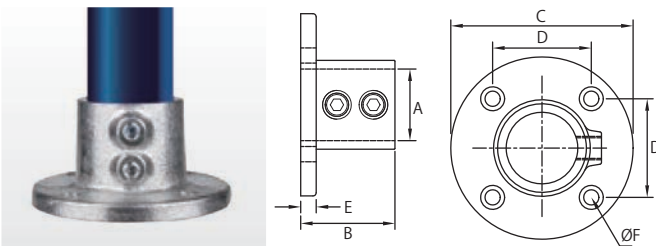**KPC-A1242** | For tube O.D. 48.30mm (1.90")**KPC-A1442** | For tube O.D. 42.40mm (1.66")


A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
50.2	58	114	64	10	11
44	57	114	64	10	11

RAILING BASE FLANGE

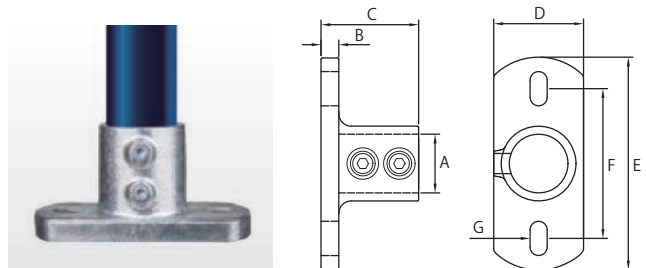**KPC-A1246** | For tube O.D. 48.30mm (1.90")**KPC-A1446** | For tube O.D. 42.40mm (1.66")

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
50.2	15	77	71	155	107.5	13.5 x 20.5
44	10	56	63.5	146.5	107.5	15 x 24


ADJUSTABLE FLANGE

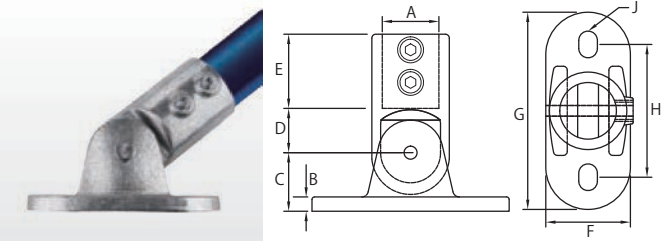

KPC-A1246ADJ | For tube O.D. 48.30mm (1.90")
KPC-A1446ADJ | For tube O.D. 42.20mm (1.66")

A	B	C	D	E	F	G	H	J
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
50.2	11	43	37	57	67	153	102	14 x 21
44	11	43	36.5	58	66	152	102	14 x 21


SIDE PALM FIXING

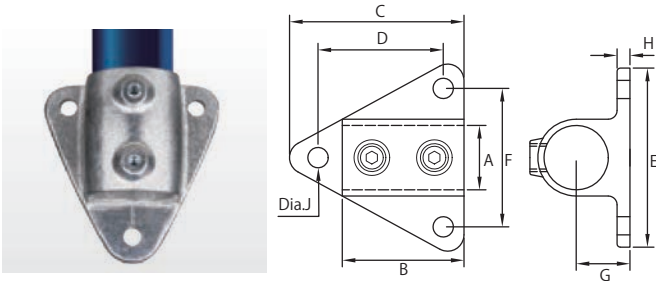

KPC-A1250 | For tube O.D. 48.30mm (1.90")
KPC-A1450 | For tube O.D. 42.20mm (1.66")

A	B	C	D	E	F	G	H	J
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
50.2	74	114	83	114	83	35	8.5	11
44	62	99	67	108	76	33	8	11


PLUG

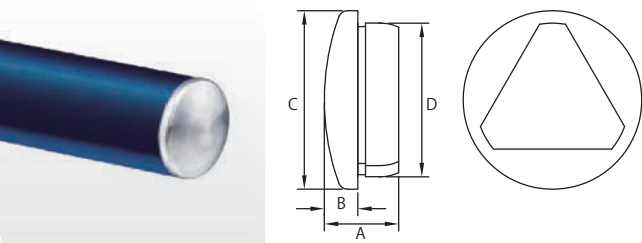

KPC-A1262 | For tube O.D. 48.30mm (1.90")
KPC-A1462 | For tube O.D. 42.20mm (1.66")

A	B	C	D
[mm]	[mm]	[mm]	[mm]
20	9	48	41.3
19.3	8.3	42	35.3


SLEEVE JOINT

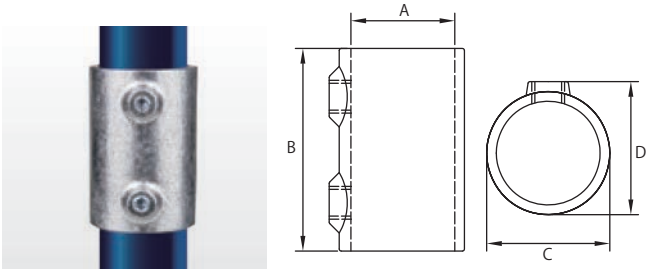

KPC-A1270 | For tube O.D. 48.30mm (1.90")
KPC-A1470 | For tube O.D. 42.20mm (1.66")

A	B	C	D
[mm]	[mm]	[mm]	[mm]
50.2	89	61	66
44	88	53	58

HANDRAIL BRACKET

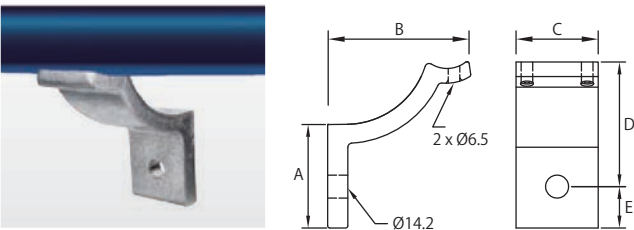

KPC-A1282A | For tube O.D. 48.30mm (1.90")

A	B	C	D	E
[mm]	[mm]	[mm]	[mm]	[mm]
66	76	51	79	24

Application



Kupo wind-up stands are constructed by chrome plated steel with geared column that enables a single operator to raise and lower heavy loads safely with just turn of a handle. Both risers extend simultaneously at one elevation of 4.4cm by per handle turn. The unique automatic self-locking mechanism is equipped to prevent the light stand from dropping unexpectedly making the operation safer.

PATENTED

THE SAFETY PIN WILL AUTO INSERT TO THE HOLEY TUBE WHEN WIND-UP.

FEATURES OF WIND-UP STAND



LOCK POSTION

The safety pin will auto insert to the holey tube when wind-up.



The stand top mounted by a steel bolt through the top tube that offers most sturdy and solid assembly.



UNLOCK POSITION

The inside spring will bring the safety pin back.



The crank handle folds back for travel. It also can be placed in between tripod legs to prevent the risers from falling accidentally if the lock is unexpectedly disengaged.



The tension of brake shoe can be adjusted with Allen wrench.



Velcro is supplied for better cable management.



Top section tube can be adjusted by stepping on foot step.



By using the leveling leg the stand can be quickly leveled on uneven terrain.



Bright color warning sticker for safety operation.



Casters are optional for easily moving the stand. The stand foot is rugged zinc-casting. Dia.: 100mm with brake and M10 attachment. A set is for three (KC-100).



483-BP Base Plate

Optional accessory to be used where the stand has to be secured to the floor for safety reason.

Compatible with stand models: 481, 482, 483T and 470. (set of three)





483T 3 SCT Wind-Up Stand
w/Auto Self-Locking Device, Silver

3 sections. Dia.: 55mm, 45mm, 38mm. Leg dia.: 30mm.
2 risers extend simultaneously at one elevation of 4.4cm per handle turn.
Safety cable ensures simultaneous retrieval of all sections. Chrome plated steel stand w/geared column. With 1 leveling leg.

L	H	h	W				T
181cm 71.3"	380cm 149.7"	172.5cm 67.9"	22.8kg 50.2lbs	128cm 50.4"	30kg 66.1lbs	KC-100 (Optional)	28mm receiver 16mm stud



KC-100 Caster for 483T Stand
Dia.: 100mm w/brakes and
M10 attachment
(17.5mm length) Set for three



483BT 3 SCT Wind-Up Stand
w/Auto Self-Locking Device, Black

3 sections. Dia.: 55mm, 45mm, 38mm. Leg dia.: 30mm.
2 risers extend simultaneously at one elevation of 4.4cm per handle turn.
Safety cable ensures simultaneous retrieval of all sections. Powder coated steel stand w/geared column. With 1 leveling leg.

L	H	h	W				T
181cm 71.3"	380cm 149.7"	172.5cm 67.9"	22.8kg 50.2lbs	128cm 50.4"	30kg 66.1lbs	KC-100 (Optional)	28mm receiver 16mm stud



KC-100 Caster for 483BT Stand
Dia.: 100mm w/brakes and
M10 attachment
(17.5mm length) Set for three



470 / 470B Followspot Stand

1 Riser, 2 Sections
 Dia.: 50mm, 40mm
 Leg Dia.: 30mm
 With 1 leveling leg
 Chrome plated centre steel post, anodized aluminum leg (470)
 Black power coated centre steel post, anodized aluminum leg (470B)
 Memory collar included

L	H	h	W				T
109cm 43"	147cm 57.9"	92cm 36.2"	7.58kg 16.7lbs	110cm 43.3"	40kg 88.2lbs	KC-100 (Optional)	28mm receiver



KC-100 Caster for 470 Stand
 Dia.: 100mm w/brakes and
 M10 attachment
 (17.5mm length) Set for three



481 2 SCT Wind-Up Followspot Stand

1 riser, 2 sections.
 Elevation: 2.2cm per handle turn
 Dia.: 55mm, 45mm
 Leg dia.: 30mm
 With 1 leveling leg
 Auto Self-Locking device
 Chrome plated steel with geared column

L	H	h	W				T
110cm 43.3"	145cm 57.1"	91cm 35.8"	13.6kg 30lbs	110cm 43.3"	50kg 110.2lbs	KC-100 (Optional)	28mm receiver



KC-100 Caster for 481 Stand
 Dia.: 100mm w/brakes and
 M10 attachment
 (17.5mm length) Set for three



482T 2 SCT Wind-Up Stand

1 riser, 2 sections.
Elevation: 2.2cm per handle turn
Dia.: 55mm, 45mm
Leg dia.: 30mm
With 1 leveling leg
Auto Self-Locking device
Chrome plated steel with geared column

L	H	h	W				T
165cm 65"	245cm 96.5"	90cm 35.4"	18.1kg 40lbs	128cm 50.4"	45kg 99.2lbs	KC-100 (Optional)	28mm receiver



KC-100 Caster for 482T Stand
Dia.: 100mm w/brakes and
M10 attachment
(17.5mm length) Set for three



483SH Short 3 SCT Wind-up Stand

3 sections. Dia.: 55mm, 45mm, 38mm Leg dia.: 30mm
2 risers extend simultaneously at one elevation of 4.4cm per handle turn.
Safety cable ensures simultaneous retrieval of all sections.
Chrome plated steel stand w/ geared column.
With 1 leveling leg.

L	H	h	W				T
152cm 59.84"	262cm 103.14"	132cm 51.96"	18.8kg 41.36lbs	128cm 50.4"	30kg 66lbs	KC-100 (Optional)	28mm receiver 16mm stud



KC-100 Caster for 483SH Stand
Dia.: 100mm w/brakes and
M10 attachment
(17.5mm length) Set for three



YOUTUBE
KUPO MASTER COMBO
HD STAND (226M)

226MB Master Combo HD Stand, Black

2 risers, 3 sections.
Dia.: 40mm, 35mm, 30mm
Leg dia.: 22mm
with 1 leveling leg
Spring cushioned
Powder coated steel

132cm 52"	340cm 133.9"	112.5cm 48.2"	10kg 22lbs	138cm 54.3"	40kg 88.2lbs	KC-080R (Optional)	28mm receiver 16mm stud



KC-080R Caster for 226MB Stand
Dia. 80 mm w/ brake,
Set for three.



226M Master Combo HD Stand

2 risers, 3 sections.
Dia.: 40mm, 35mm, 30mm
Leg dia.: 22mm
with 1 leveling leg
Spring cushioned
Chrome plated steel

132cm 52"	340cm 133.9"	112.5cm 48.2"	10kg 22lbs	138cm 54.3"	40kg 88.2lbs	KC-080R (Optional)	28mm receiver 16mm stud



KC-080R Caster for 226M Stand
Dia. 80 mm w/ brake,
Set for three.



KS-080 FOR 470 STAND
Ball Race M10 stud

KS-082 FOR 470 STAND
Ball Race M12 stud.



KS-040 FOR 470 STAND
28 mm Pin w/ M10 thread
& Dia.12cm plate.

KS-042 FOR 470 STAND
28 mm Pin w/ M12 thread
& Dia.12cm plate.




KS-235 Speaker Adapter

Connecting lighting stand and speaker easily and stably. Suitable for most speakers in the market and large lighting stand with 28mm receiver. Made of iron solid rod with chrome-plate finish, this adapter is durable and tough. Covert 28mm to 35mm spigot.



KS-055 Junior Multi Header

Constructed by solid steel square tube with 100cm (40") length and anti-reflection black coating. Five junior receivers are well-welded for maximum five lighting fixtures. Attached with a junior stud (28mm) for universal stand top or any mounting accessories coming with junior socket. Max loading weight is 50kg but please note that when load on one side only, max loading weight would be 15kg.



KS-056 6X Lantern T-Bar

1420 mm(55.9") long solid steel square tube attached with solid steel 28mm spigot. Six butterfly nuts are equipped on the bar for maximum mounting six lighting fixtures. Max loading weight is 12kg but please note that when load on one side only, max loading weight would be 6kg.



YOUTUBE
KUPO BABY TRIPLE
HEADER (KS-066)



A threaded nub on the side of bar
to hold the knob when using on a junior stand.

KS-066 Baby Triple Header

Five baby studs with embossed neck welded on sturdy steel, offset for mounting five lights. The central adapter with unique design that can be mounted on the stand top of a baby stud (16mm) or fitting into a junior receiver (28mm).





473B Tall Stand Black

2 risers, 3 sections.
Dia.: 35mm, 30mm, 25mm,
Leg dia.: 22mm
With 1 leveling leg

Powder coated steel
Smaller footprint better for tighter space.
Light weight for easier transportation.

L	H	h	W			T
155cm 61"	380cm 149.6"	149.5cm 58.9"	11.5kg 25.35lbs	102cm 40.2"	25kg 55lbs	28mm receiver 16mm stud



Ø19mm
(355 stand)
Ø16mm
(356 stand)
Ø28mm



355-A2819
28mm to 19mm
adapter is supplied
with 355 stand
(optional to 356 stand).



356-A2816
28mm to 16mm adaptor
is supplied with 356 stand
(optional to 355 stand).

355 Universal Floor Stand (with 19mm Socket receiver)

356 Universal Floor Stand (with 16mm Socket receiver)

Low profile, lightweight compact folding floor stand. Constructed of anodized aluminum legs and central column. With die-casting legs mount. Design for a 28 mm spigot, a 19 mm spigot with supplied adaptor. Optional adaptor for 16 mm is available.

L	H	W			T
35.1cm 12.4"	13cm 5.12"	1.07kg 2.35lbs	60cm 23.6"	10kg 22lbs	28mm receiver 16mm / 19mm stud

484 Heavy Duty Wind-Up Stand w/ Braked Caster

3 sections., Dia.: 70mm, 60mm, 50mm
Leg dia.: 35mm
2 risers extend simultaneously at one elevation of 4.4cm per handle turn.
Top 2 sections: Chrome plated steel
Center tube & legs: Stainless steel
With 1 leveling leg
With Auto Self-Locking Device
With Braked Caster

						
196cm 77.2"	386cm 152"	179cm 70.5"	39kg 86lbs	180cm 70.9"	80kg 176.3lbs	28mm receiver

PATENTED

THE SAFETY PIN WILL AUTO INSERT TO THE CENTER TUBE WHEN WIND-UP.

FEATURES OF HEAVY DUTY WIND-UP STANDS:



28mm socket with 3 side holes for wind bracing kit.



Auto Self-Locking Device stop unexpected drop-off, and make operation safer.



Solid and strong handle with slip-free design offer excellent operation.



Larger foot step with skidproof texture design.



U-shaped struts are made of stainless steel for extra stability and safety.



KC-150R industry 6" braked caster with angle adjustable plate allows 484 to stably stand on the ground when the caster is removed.





RS-RR3807 Rope Ratchet Tie Down

Ratchet rope is a locking tie-down designed for tethering the top of stand to ground or any firm position securely. The chrome-plated steel hook for strength and resistance to corrosion and zinc casting gear for greatest durability. The rope is braided by polyester which is 3/8" (9.5mm) in diameter and 23'(7M) in length. A thumb release for quick detachment. Max. load capacity 250lb (113.6kg)



485 Heavy Duty Wind Up Low Base stand w/ Braked Caster

3 sections., Dia.: 70mm, 60mm, 50mm

Leg dia.: 35mm

2 risers extend simultaneously at one elevation of 4.4cm per handle turn.

Top 2 sections: Chrome plated steel

Center tube & legs: Stainless steel

With 1 leveling leg

With Auto Self-Locking Device

With Braked Caster

L	H	h	W			T
156cm 61.4"	270cm 106"	140.5cm 55.31"	34kg 4.8 lb	130cm 51.20"	80kg 176.3lb	28mm receiver

Sandbag is an indispensable safety measure on any set to ensure that stands don't tip over and damage expensive equipment and cause injury, resulting in expensive downtime. Kupo sandbag features a saddlebag design that is ideally suited to drape over stand legs and boom arms. It ships empty so that you can fill it with your choice of weighty material translating to much lower shipping costs. Double velcro design also ensures no sands leaking out of the bags. There's a convenient handle with rubber cover on top for easy repositioning and an eyelet and spring lock equipped for attaching to boom hooks.



New handle with rubber cover for better grip.



Double Velcro ensures no sands leaking out of the bags.

KSD-1680S Empty Saddle Sand bag

Dimension: 30cm (12") X 22cm (8.5") X 5cm (2")
Construction: Reinforced double Ply Nylon

W 500g (17.6oz) **↓** 6kg (13lbs)



KSD-1680M Empty Saddle Sand bag

Dimension: 45cm (17.5") X 22cm (8.5") X 5cm (2")
Construction: Reinforced double Ply Nylon

W 600g (21.2oz) **↓** 11kg (24.2lbs)



Spring lock is equipped on the sand bag for easy mounting to the stand as a counterweight.



Two regular 600ml bottled water can be put into the side pouch of sand bag.



Butterfly lift handles.



KSD-1680L Empty Saddle Sand Bag

Feature a reinforced handle sewn into both sides of the bag using a box and cross pattern. Also a fly away handle equipped allows to drape over light stand leg. The loading weight on blue label for easy identification.

Dimension: 36cm (14.2") x 28cm (11") x 6cm (2.4")

W 450g (16.9oz) **↓** 16kg (35lbs)



Butterfly lift handles.



KSD-1680XL Empty Butterfly / Fly Away Sand Bag **W** 460g (16.23oz) **↓** 22.7kg (50lbs)

The handle is sewn into the pocket edges, creating a wing motion when the bag is lifted allows to easily "releases" the bag from your stands and booms. The loading weight on blue label for easy identification.
Dimension: 36cm (14.2") x 34cm (14") x 6cm (2.4")

The new solid construction shot bag with non-slip strap design allows to weight down light stands by just wrapping around the stand base. The premium shot bag also offers a variety of use included offset a boom arm, wrap around tripod or light stand bases, or hang midway on a stand handle to offset the weight of something. The 2mm steel balls are pre-filled and sealed up with the bag which makes it dense weight and never leak. The compact size design also makes the shot bag easy to carry, pack and does the job perfect.



Weight on the label for easy identification.



Non-slip strap keeps bag from slipping off.



On the lightweight aluminum stand.



On the Grip Arm.



KSW-05 Wrap & Go Shot Bag

Maximum Load Capacity: 2.28kg (5lbs)



YOUTUBE

KUPO WRAP & GO SHOT BAG

KSW-10 Wrap & Go Shot Bag

Maximum Load Capacity: 4.55kg (10lbs)

Kupo Shot Bags are made of 1000 denier black cordex textured Nylon with a water resistant polyurethane coating on the inside. 2mm steel ball are encapsulated in poly inner bag and sealed up with the bag which makes it dense weight and never leak. Two wings design allows to drape perfectly over light stand legs. weight: 6.8kg (15lbs)



Two wings allow to drape over light stand legs.



Loading weight is on the blue label for easy identification.



KSF-15 Shot Bag

Maximum Load Capacity: 6.5kg (15lbs)

KSF-25 Shot Bag

Maximum Load Capacity: 11.3kg (25lbs)



KSF-25

KUPO X-Bone is a perfect solution for the needs on the move, featuring lightweight, compact and durable. The foldable structure makes it easy to transport and unfold in minutes. Aluminum alloy makes it lightweight yet sturdy for frequent usage. Ideal for using as concert mobile stage, portable stage, catwalk or fashion runway with. Customized dimensions are available upon request.

Features

- 1. Made of high intensity aluminum alloy (6061-T6); load capacity 500kg /square meter.
- 2. Quick and easy to build up and break down in around two minutes per set.
- 3. Stylish and slim profile; lightweight and compact; require less space to archive.
- 4. Various sizes make flexible applications viable.
- 5. Plywood platform is available with red or black carpet, or black waterproof anti-slip surface.



Dimensions available
◀ in S/M/L three sizes;
height selections from
20cm to 100cm.



Foldable and compact for storage and transport.



Each corner pillar has connection design to get fastened with the platform.



Extremely space saving for the greatest mobility

Product	Description	Unfold Height / Remark	Weight (kg)
SMALL			
KXB-S20	X-Bone, 100cm(L) x 100cm(W)	20cm	2.5
KXB-S40	X-Bone, 100cm(L) x 100cm(W)	40cm	2.7
KXB-S60	X-Bone, 100cm(L) x 100cm(W)	60cm	3.1
KXB-S80	X-Bone, 100cm(L) x 100cm(W)	80cm	3.5
KXB-S100	X-Bone, 100cm(L) x 100cm(W)	100cm	4.0
KXB-SP1R (or SP1BK)	Plywood platform, 100cm(L) x 100cm(W)	Red Carpet / Black Carpet	13.0
KXB-SP2	Plywood platform, 100cm(L) x 100cm(W)	Black waterproof anti-slip surface	12.0
MEDIUM			
KXB-M20	X-Bone, 122cm(L) x 122cm(W)	20cm	2.7
KXB-M40	X-Bone, 122cm(L) x 122cm(W)	40cm	3.0
KXB-M60	X-Bone, 122cm(L) x 122cm(W)	60cm	3.8
KXB-M80	X-Bone, 122cm(L) x 122cm(W)	80cm	4.7
KXB-MP1R (or MP2BK)	Plywood platform, 122cm(L) x 122cm(W)	Red Carpet / Black Carpet	20.0
KXB-MP2	Plywood platform, 122cm(L) x 122cm(W)	Black waterproof anti-slip surface	17.5
LARGE			
KXB-L20	X-Bone, 200cm(L) x 100cm(W)	20cm	2.5
KXB-L40	X-Bone, 200cm(L) x 100cm(W)	40cm	2.7
KXB-L60	X-Bone, 200cm(L) x 100cm(W)	60cm	3.1
KXB-L80	X-Bone, 200cm(L) x 100cm(W)	80cm	3.5
KXB-L100	X-Bone, 200cm(L) x 100cm(W)	100cm	4.0
KXB-LP1R (or LP1BK)	Plywoo platform, 200cm(L) x 100cm(W)	Red Carpet / Black Carpet	26.0
KXB-LP2	Plywoo platform, 200cm(L) x 100cm(W)	Black waterproof anti-slip surface	25.0

Constructed of strong aluminum frame with 18mm thickness plywood platform, this folding stage is robust and gives the ultimate flexibility for building up a stage without too much effort. Ideal for any event with the need of portable or mobile stage. Customized dimensions are available upon request.

Features

- 1. Made of high tensile aluminum alloy (6061-T6); load capacity 750kg /square meter.
- 2. Foldable for the convenience of storage and transportation.
- 3. Height adjustable from 50cm to 100cm (subject to specification).
- 4. Plywood platform (18mm thickness) is applied with waterproof and anti-slip surface.

Product	Description	Unfold Height / Remark	Weight
KXB-F01	Folding stage, 200cm(L) x 100cm(W)	With 50cm/80cm adjustable legs	55kg
KXB-F02	Folding stage, 244cm(L) x 122cm(W)	With 60cm/80cm/100cm adjustable legs	66kg



Folding Stage



Multiple units can be put together for a larger stage.



Rectangular stage is designed to fold in half, turning to a square shape, for the greatest portability and storage.



Each folding stage comes with 6 adjustable legs, making height adjustable from 50cm to 100cm (subject to model); the height is secured by bolt and nut.

Fiberglass step ladder features non-conductive channel for working safety. Resistant to electricity, and will not dent and rust. Fiberglass step ladder is ideal for professional use. Load capacity 135kg (300lbs) and meet ANSI 14.5 (2007) and EN131 standard.



Ladder top tool tray to secure tools from falling while keeping them right at hand.



Molded brace and slip-resistant foot pad combination at the bottom increases the protection against damage.

* Attention: Please read the information of warning labels posted on the ladder for making the use of ladder properly.

Features

- 1. Red color for the greatest visibility and caution.
- 2. Fiberglass channel is non-conductive for working around electricity.
- 3. U-shape channel made of multi-layer fiberglass for maximum strength.
- 4. Wide step for comfortable standing or climbing.
- 5. Every rivet well backed up to protect channel.
- 6. Back-up aluminum plates reinforce all top connectors.

Item	Description	Height	Close Height	Steps	Style	Top Feature	Weight	Load Capacity
KFL-B4	4' Fiberglass Ladder	110cm	120cm	3	Single-sided	Tool Tray	8.9 kg	135 kg
KFL-T4	4' Fiberglass Ladder	110cm	120cm	3	Double-sided	Tool Tray	11.5 kg	135 kg
KFL-B6	6' Fiberglass Ladder	170cm	180cm	5	Single-sided	Tool Tray	8.9 kg	135 kg
KFL-T6	6' Fiberglass Ladder	170cm	180cm	5	Double-sided	Tool Tray	11.5 kg	135 kg
KFL-B8	8' Fiberglass Ladder	230cm	240cm	7	Single-sided	Tool Tray	12.0 kg	135 kg
KFL-T8	8' Fiberglass Ladder	230cm	240cm	7	Double-sided	Tool Tray	15.5 kg	135 kg
KFL-B10	10' Fiberglass Ladder	290cm	300cm	9	Single-sided	Tool Tray	14.9 kg	135 kg
KFL-T10	10' Fiberglass Ladder	290cm	300cm	9	Double-sided	Tool Tray	19.3 kg	135 kg
KFL-B12	12' Fiberglass Ladder	350cm	360cm	11	Single-sided	Tool Tray	18.3 kg	135 kg
KFL-T12	12' Fiberglass Ladder	350cm	360cm	11	Double-sided	Tool Tray	25.5 kg	135 kg
KFL-D20	20' Fiberglass Extension Ladder	1130cm	625cm	40	Extension	N/A	19.4 kg	135 kg



Ladder top tool tray to secure tools from falling while keeping them right at hand.



Slip-resistance aluminum step is secured with 6 rivets on fiberglass channel.



Extra heavy duty aluminum spreaders to secure the ladder in A shape.



Molded brace and slip-resistant foot pad combination at the bottom increases the protection against damage.